

Explanation of caliper letter codes: 19-1336 or 19-1336A


Application

Ford Escort, EXP, ZX2 1991- 2001 Front Caliper Loaded or Unloaded.

Problem

Brake rotors grind against caliper bracket.

- Cause Customer installation of 19-1336/7 calipers on vehicles requiring "A" version. It is possible to put the non-A version caliper on the "A" version vehicle but clearance between the rotor and bracket is minimal. Road shock could cause rotor-to-bracket contact. Noise, customer dissatisfaction and unit failure will result.
- Solution Counterperson must make sure customer gets the correct caliper for the application. Please reference the catalog for specific applications. The pictures below show casting numbers that can be used to assist in caliper identification.

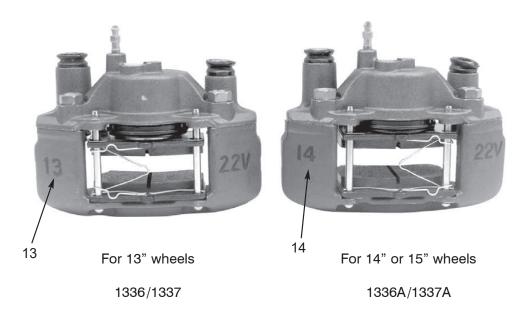

©2020 CARDONE Industries, Inc. ProTech[®] is a registered trademark owned by CARDONE Industries, Inc. CARDONE[™] is a pending trademark registration owned by CARDONE Industries, Inc.

For other ProTech® publications, visit www.cardone.com