

CARDONE™ ProTech®

Supporting Today's Vehicle Technician




Power Steering Binding or Lack of Assist After Installation

Application All vehicles with Power Steering.

Problem Binding, poor return ability, leaking, stiff steering, noise or fluid overheating.

Cause Restricted flow of hydraulic fluid. Kinked or damaged line or accumulation of grit and debris, block proper flow of fluid through Power Steering System.

Solution Check hose routing and condition. Make sure all lines are O.E. Specification. Before installing any replacement unit, flush the entire system and replace **ALL** hoses.

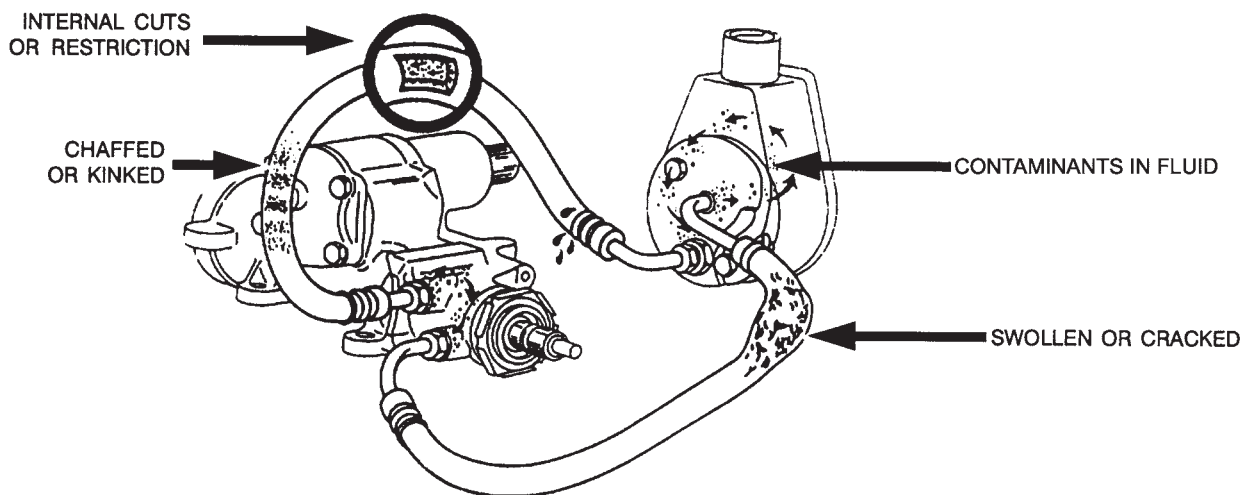

Note CONTAMINATED FLUID COULD CAUSE THE SAME SYMPTOMS. ALWAYS FLUSH THE ENTIRE SYSTEM AND INSTALL A POWER STEERING FILTER.