



**Edelbrock E-Force Supercharger  
Grand Sport Corvette  
Part #1574, 1575 & 1576**





## **WARNING!**

*The supercharger bypass valve is factory installed and adjusted intended to be vacuum operated only. DO NOT move the solenoid actuator lever by hand or adjust the stop point. Moving the lever manually will damage the solenoid and the system will not function properly. Damage to the bypass assembly from manual movement will not be covered under manufacture warranty.*





**Edelbrock GM LS3 Supercharger System for  
2010-2013 Grand Sport Corvettes  
PN 1574, 1575 & 1576  
Installation Instructions**

**E-MAIL EDELBROCK YOUR STOCK VEHICLE CALIBRATION AND VEHICLE INFORMATION**

**PLEASE COMPLETE THIS PROCEDURE PRIOR to starting the installation of your E-Force supercharger system. This will allow our calibration team to complete your calibration file while the installation of your supercharger system is being completed. Manufacturers regularly update the factory calibration, as a result, there is the possibility for delays due to not having access to your current calibration file. This can normally be resolved in 1 business day.**

**FAILURE TO PROVIDE ALL OF THE INFORMATION BELOW WILL DELAY THE COMPLETION OF THE CALIBRATION FILE FOR YOUR VEHICLE. TO LIMIT VEHICLE DOWN TIME, PLEASE SEND US THE REQUESTED INFORMATION BEFORE STARTING THE SUPERCHARGER INSTALL.**

Please e-mail the requested information below to [calibration@edelbrock.com](mailto:calibration@edelbrock.com) with the E-mail Subject as **“Calibration Update”**. We will complete your calibration and e-mail it back to you as soon as possible. MOST calibration updates will be sent back the same business day. In rare cases, it could take up to 1-2 business days to complete. Please contact our Tech Hot Line at (800)416-8628 if you have any questions or if you need assistance with this procedure.


- Begin by downloading the SCT device updater software to your computer; it can be downloaded from: <http://www.sctflash.com/software/SCTDeviceUpdater.exe>
- Put the vehicle into ACC mode but do not start the engine.
- Connect the supplied PCM cable from the programmer to the OBD-II connector.
- Select PROGRAM VEHICLE, use the arrow keys to highlight UPLOAD STOCK and press SELECT. Follow the prompts on the screen.
- If the upload fails, you will be asked to AUTO DETECT. Press SELECT and follow the prompts on the screen. If the auto detect fails, please contact Edelbrock Tech Support @ 800-416-8628.
- Once the stock calibration has loaded to the handheld programmer, disconnect the programmer from the OBD-II connector and connect it to your PC using the supplied USB cable.
- Open the SCT software and select the button on the lower left hand side that reads GET STOCK FILE FROM DEVICE. Follow the instructions on the screen. **NOTE: The stock calibration file will automatically be labeled using your VIN number followed by “.sul “ (XXXXXXXXXXXXX.sul)**
- Once the download is complete, you can E-mail your stock vehicle calibration along with the vehicle information below to [calibration@edelbrock.com](mailto:calibration@edelbrock.com) or call 800-416-8628 and our Tech Support staff will assist you with E-mailing the file. **NOTE: The subject line of your E-mail should read “Calibration Update”.**
- Once we have the stock calibration file, along with the requested information below, we can update the calibration to work with your application. We will E-mail you the custom calibration which may be used until the release version of the calibration is available.

**INFORMATION NEEDED:**

- |  |                                  |
|--|----------------------------------|
| E-Mail Address:                            | Transmission:                    |
| Vehicle Year:                              | Fuel Octane (91 or 93 ONLY):     |
| Vehicle Make:                              | Supercharger System Part Number: |
| Vehicle Model (Specify if Z06, Z51, etc.): | Supercharger Serial Number:      |
| Engine Size:                               | Programmer Serial Number:        |



TEMPLATE, SHROUD,  
C6 CORVETTE, LH

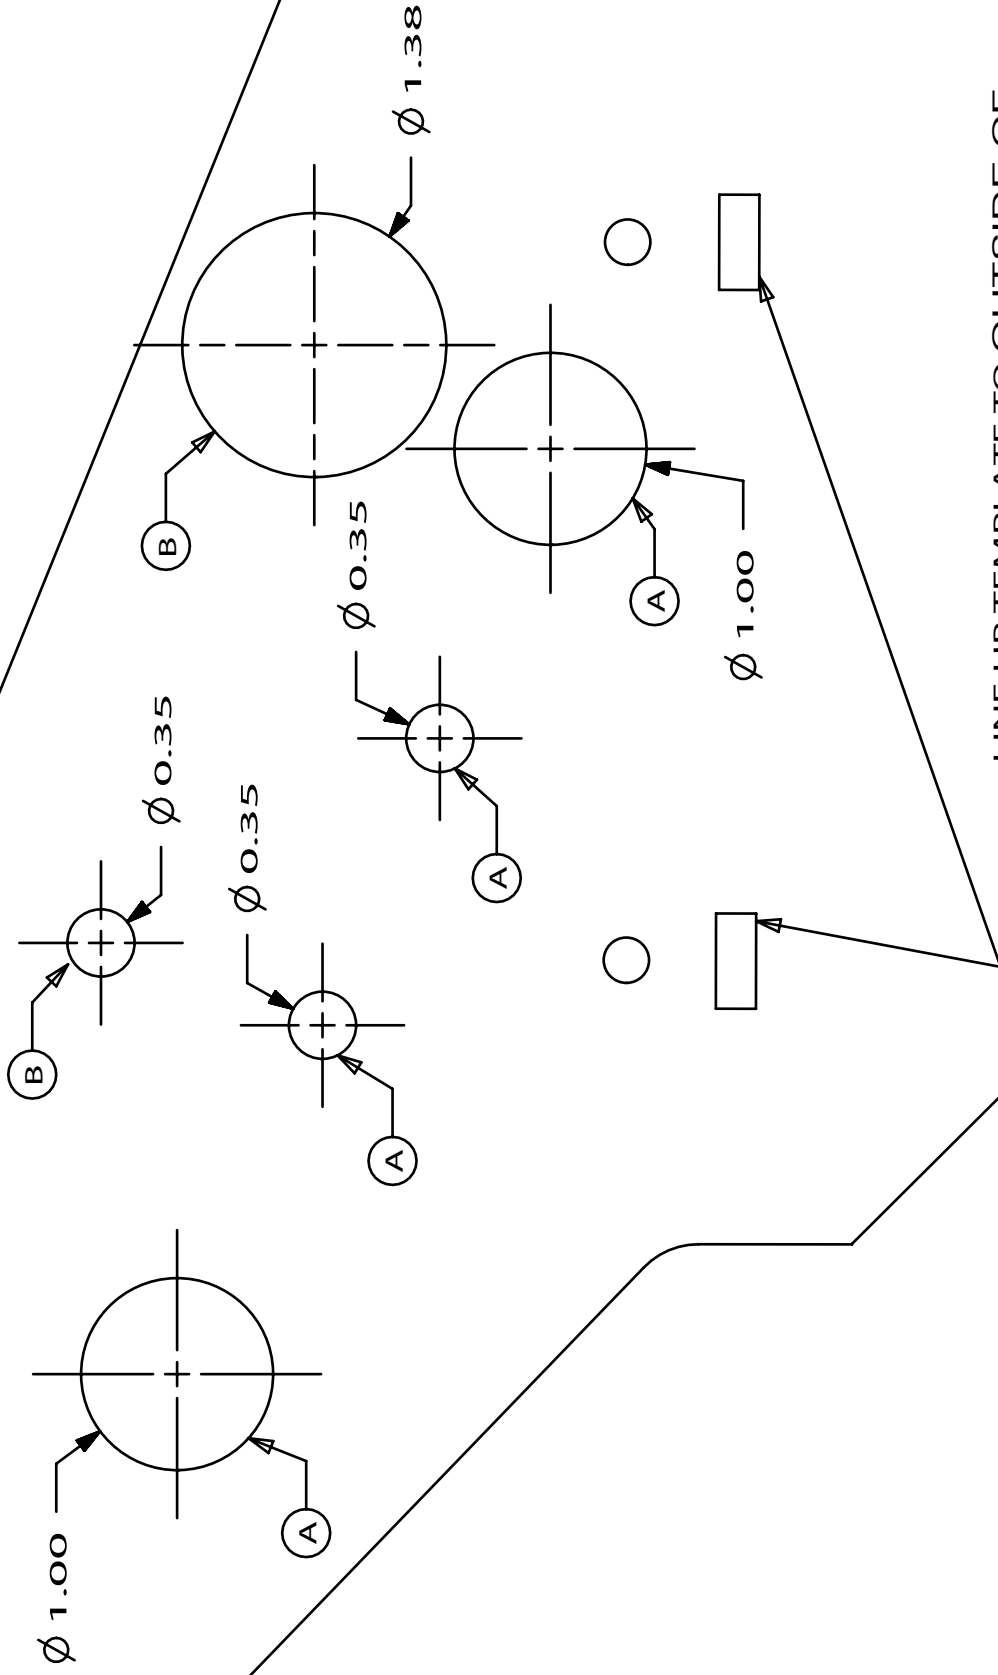

LINE UP TEMPLATE TO OUTSIDE OF  
SHROUD USING THESE FEATURES

# LH

FOR VEHICLES EQUIPPED WITH AUX. OIL COOLER,  
DRILL HOLES MARKED A & B.

FOR VEHICLES NOT EQUIPPED WITH AUX. OIL COOLER,  
DRILL HOLES MARKED B ONLY.








TEMPLATE, SHROUD,  
C6 CORVETTE, RH


**RH**

LINE UP TEMPLATE TO SHROUD  
USING THESE FEATURES

DRILL HOLES MARKED A FOR ALL VEHICLES

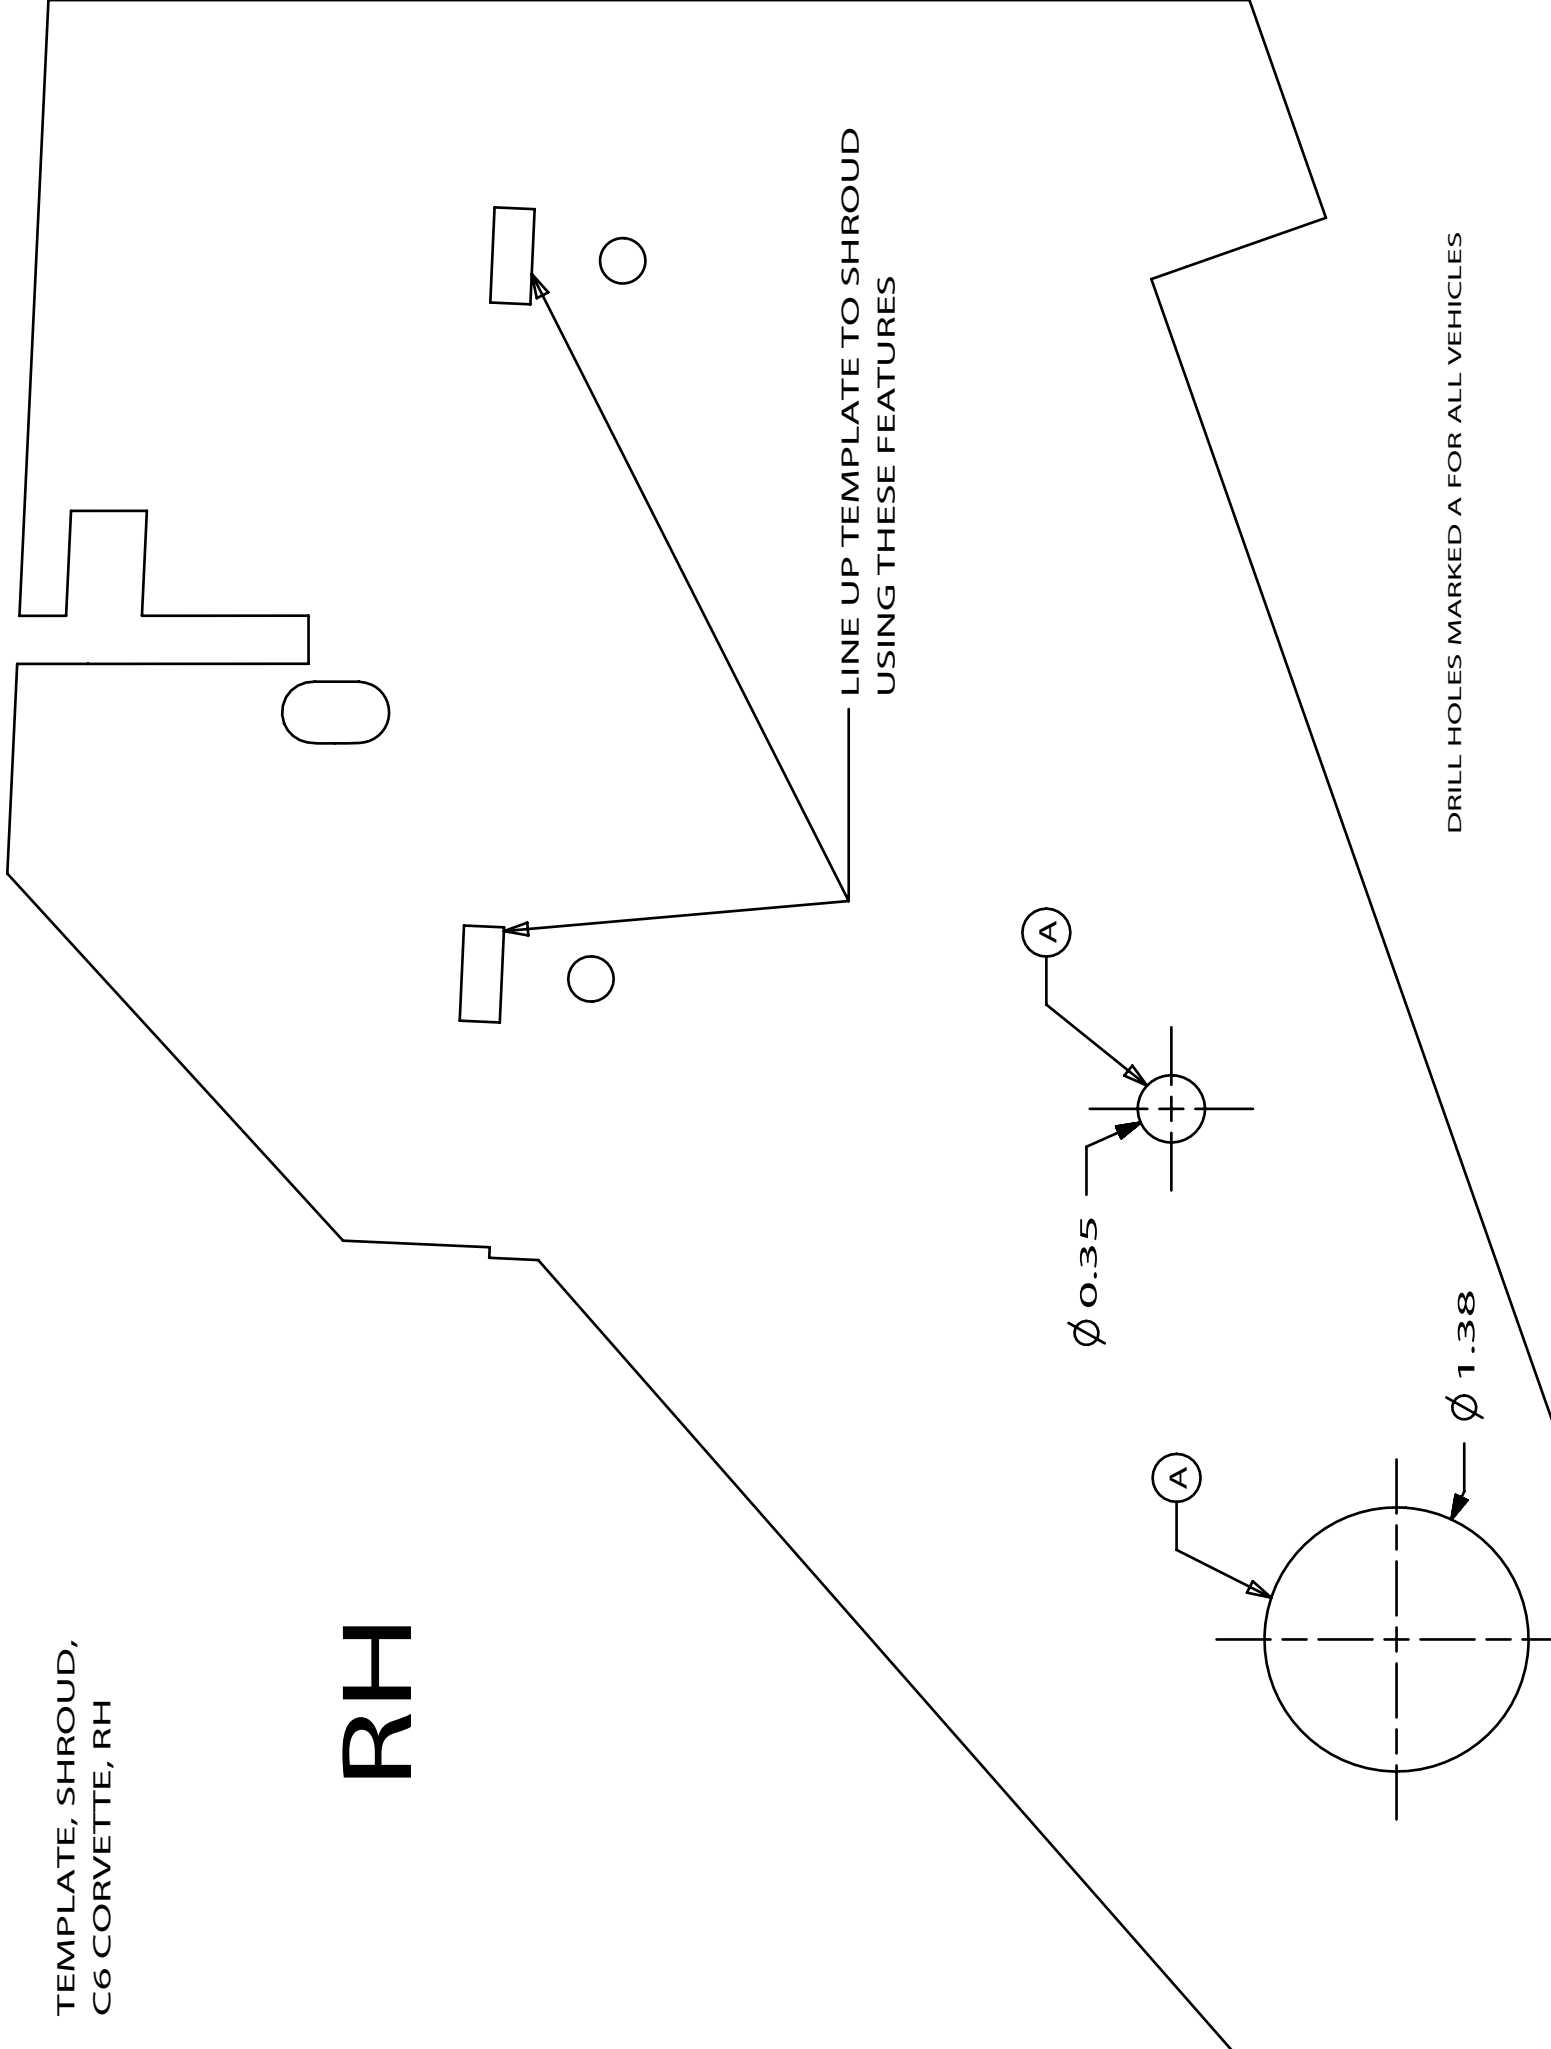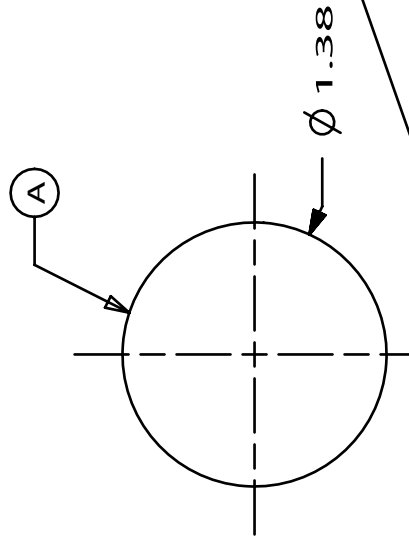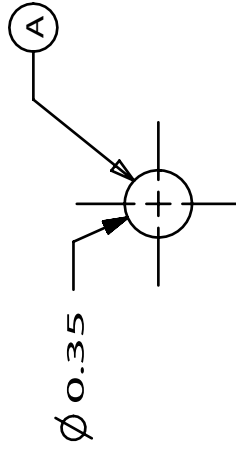



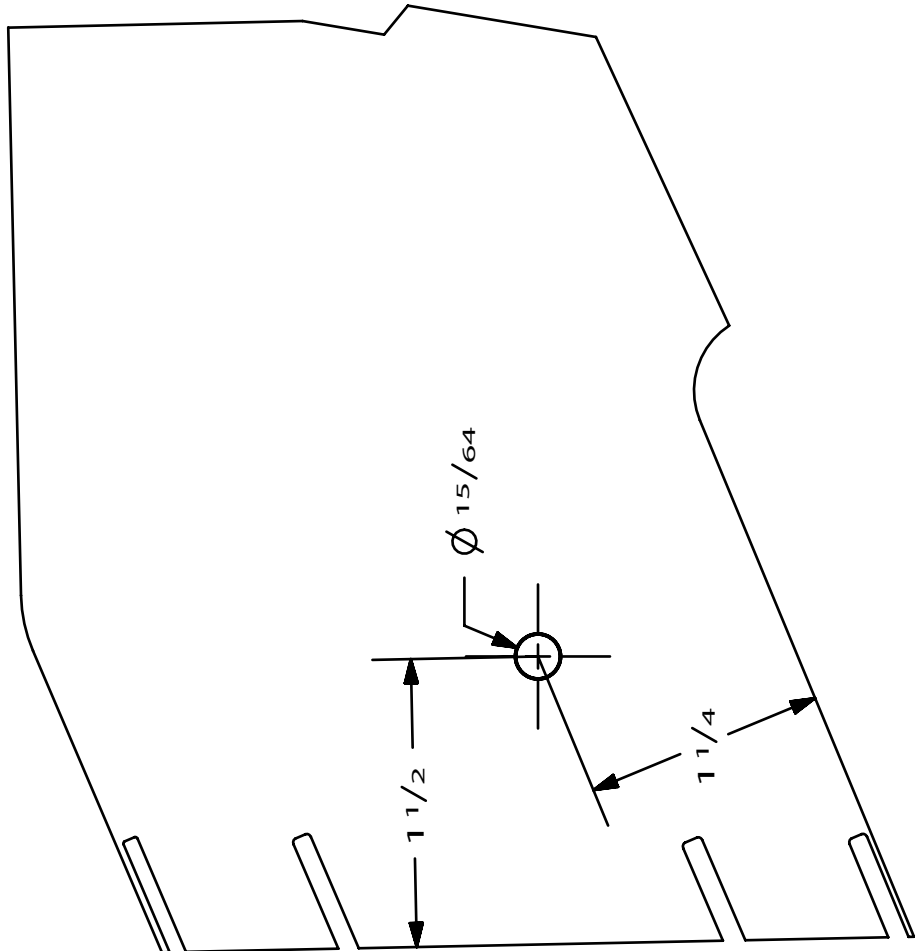





**Edelbrock GM LS3 Supercharger System for  
2010-2013 Grand Sport Corvettes  
PN 1574, 1575 & 1576  
Installation Instructions**

## **INTRODUCTION**

Thank you for purchasing the Edelbrock Supercharger System for the 2010-2013 Grand Sport Corvette. This Edelbrock E-Force Supercharger System utilizes Eaton's Gen VI 2300 TVS Supercharger rotors, featuring a 4-lobe design with a 160° twist for maximum flow, minimum temperature rise, quiet operation, and superior reliability. The inverted design places the supercharger down low in the valley allowing for extra-long intake runners to maximize low end torque and part throttle response. The air-to-water intercooler paired with the front-mount low temperature radiator ensures your engine is breathing cool air even in the most extreme conditions. With its ground pounding low end torque and high efficiency cooling system, the Edelbrock E-Force supercharger is the perfect match for your Grand Sport Corvette. This kit is 50 state emissions legal with the supplied Edelbrock PCM calibration.

## **TOOLS AND SUPPLIES REQUIRED**

- Jack and Jack Stands  
**OR** Service Lift
- Panel Puller
- Ratchet and Socket Set including: 7mm, 8mm, 10mm (standard, deep and universal), 11mm, 12mm (deep), 13mm, 15mm, 18mm, 21mm (deep), 24mm
- Wrenches including: 8mm, 18mm, 27mm
- 18mm Line Wrench
- 12" Ratchet Extension Bar
- 1/2" Breaker Bar
- Flat Blade & Phillips Screwdrivers
- Compressed Air
- Torx-20 Driver
- Allen Wrenches including: 5mm, 6mm, 8mm
- 5/8" Fuel Line Removal Tool
- Torque Wrench
- Needle Nose Pliers
- Pliers  
**OR** Hose Clamp Removal Tool
- Pneumatic or Power Drill
- Impact Wrench
- Loctite 609 Retaining Compound or equivalent
- O-ring Lube
- Anti-seize
- Masking Tape
- DT-47731 Transmission Cooler Quick Disconnect Tool
- J-42188 Ball Joint Separator
- J-42386-A Flywheel Holding Tool

**Edelbrock LLC, 2700 California Street, Torrance, CA 90503  
Toll-Free Tech Line: 1-800-416-8628**



**Edelbrock GM LS3 Supercharger System for  
2010-2013 Grand Sport Corvettes  
PN 1574, 1575 & 1576  
Installation Instructions**

**IMPORTANT WARNINGS**

***Before beginning the installation, use the enclosed checklist to verify that all components are present in the box then inspect each component for damage that may have occurred in transit. If any parts are missing or damaged, contact Edelbrock Technical Support (800-416-8628), not your parts distributor.***

***SPECIAL NOTE FOR OWNERS OF THE 1575 599HP KIT***

If you purchased the 599HP supercharger kit P/N: 1575, then your kit includes an upgraded in-tank Z06 fuel pump to support the additional horsepower over the standard, 554HP, kit P/N: 1574. Edelbrock strongly recommends that before beginning the install of your 1575 supercharger kit, you take the vehicle to a Chevrolet dealership or experienced Corvette repair facility for installation of this pump per the specified GM workshop manual procedure. Once installed, follow these instructions to install the Edelbrock system.

**NOTE:** Competing systems often recommend, or utilize, voltage amplifiers for the purpose of increasing the output of the stock fuel pump. While these systems do work, and will work in conjunction with the E-Force superchargers as well, Edelbrock does not endorse their use, as they can significantly reduce the life of the stock fuel pump resulting in possible engine damage. Edelbrock strongly feels that the increased effort to install the upgraded in-tank Z06 fuel pump assembly, included in the 1591 kit, is the proper way to address the need for increased fuel volume.



**WARNING:** *Installation of this supercharger will result in a significant change to the performance characteristics of your vehicle. It is highly recommended that you take some time to familiarize yourself with the added power and how it is delivered. This must be done in a controlled environment. Take extra care on wet and slippery roads as the rear tires will be more likely to lose traction with the added power. It is never recommended to turn off your vehicles traction control system.*

***Proper installation is the responsibility of the installer. Improper installation will void all manufacturer's standard warranties and may result in poor performance and engine or vehicle damage.***

Due to the complexity of the Edelbrock E-Force Supercharging system, it is recommended that this system only be installed by a qualified professional with access to a service lift, pneumatic tools, and a strong familiarity with automotive service procedures. To qualify for the optional supplemental warranty, it is necessary to have this system installed by a Certified ASE Technician, GM Dealership, or an Authorized Edelbrock Installer. Failure to do so will void and/or disqualify any and all optional supplemental warranties offered with this system. Please contact the Edelbrock Technical Support department if you have any questions regarding this system and/or how your installer of choice will affect any warranty coverage for which your vehicle may qualify.



**Edelbrock GM LS3 Supercharger System for  
2010-2013 Grand Sport Corvettes  
PN 1574, 1575 & 1576  
Installation Instructions**

**IMPORTANT WARNINGS (CONTINUE)**

***Any previously installed aftermarket tuning equipment must be removed and the vehicle returned to an as stock condition before installing the supercharger.***

Any equipment that directly modifies the fuel mixture or ignition timing of the engine can cause severe engine damage if used in conjunction with the Edelbrock E-Force Supercharger System. This includes, but is not limited to: ignition boxes, air/fuel controllers, OBDII programmers, and any other device that modifies signals to and/or from the ECU. Aftermarket bolt-on equipment such as underdrive pulleys or air intake kits will also conflict with the operation of the supercharger and must be removed prior to installation. Use of any of these products with the E-Force Supercharger could result in severe engine damage.

MINIMUM OCTANE RATING  
(R + M) / 2 METHOD

**91**

***91 octane or higher gasoline is required at all times. If your vehicle has been filled with anything less, it must be run until almost dry and refilled with 91 or higher octane gasoline twice prior to installation.***

***Failure to use the required 91 octane gasoline or higher could permanently damage your engine. Any failures associated with not using premium 91 octane gasoline or higher, will be ineligible for warranty repairs.***

***It is also recommended that you check the Edelbrock Tech Center Website for any updates to this installation manual. Please refer to the lower right hand corner to verify that you have the latest revision of this installation manual before beginning the installation.***

***Tech Center: <http://www.edelbrock.com/automotive/misc/tech-center/>***

**EDELROCK AUTHORIZED INSTALLER DISCLAIMER**

Authorized installers of Edelbrock products are independent companies over which Edelbrock has no right of control. Edelbrock LLC makes no claims regarding the abilities, expertise or competency of individual employees of any authorized installer. Each authorized installer is an independent company and makes its own independent judgments. Edelbrock LLC specifically disclaims any responsibility to any party including third parties for the actions, or the failure to act, of individuals, agents or a company authorized in the installation of Edelbrock LLC products.

**INSTALLATION HARDWARE IDENTIFICATION GUIDE**

**Bag #1**



(2x) - M8 Washer

(3x) - M8 x 1.25 x 20mm  
Hex Flange Bolt



(1x) - M10 x 1.5 x 75mm Hex Flange Bolt



(1x) - M10 x 1.5 x 45mm Socket Head Bolt



(3x) - M8 x 1.25 x 90mm Hex Flange Bolt

**Bag #2**



(1x) - M8 x 1.25 x 30mm  
Hex Flange Bolt

(3x) - M6 x 1 x 16mm  
Hex Flange Bolt



(2x) - M6 x 1 x 20mm  
Hex Flange Bolt

(1x) - Nylon Body Pin



(1x) - Lower Intercooler Reservoir Bracket



(2x) - 1/2" Hose Clamp



(1x) - Upper Intercooler Reservoir Bracket



(6x) - 3/4" Hose Clamp



**Bag #3**



(11x) - M8 x 1.25 x 25mm  
Countersunk Socket Head Bolt



(8x) - M6 x 1 x 45mm  
Hex Flange Bolt



(4x) - M6 x 1 x 12mm  
Socket Head Bolt



(4x) - M6 x 1 x 16mm  
Button Head Bolt

**Bag #4**

(1x) - GM Factory Harmonic Balancer Bolt



(1x) - M16 x 2 x 120mm Hex Bolt



Drill Hole

Ream Hole

Bolt Hole

(1x) - Crank Pinning Drill Guide

(1x) - 1/4" x 3/4" Steel Dowel



(1x) - 15/64" High Speed Steel Drill Bit



(1x) - .2500" Reamer

**Bag #5**



(1x) - Barbed Quick Connect Fitting


(2x) - Air Inlet Tube Retainer Grommet



(1x) - Air Inlet Tube PCV Grommet



**Bag #6**

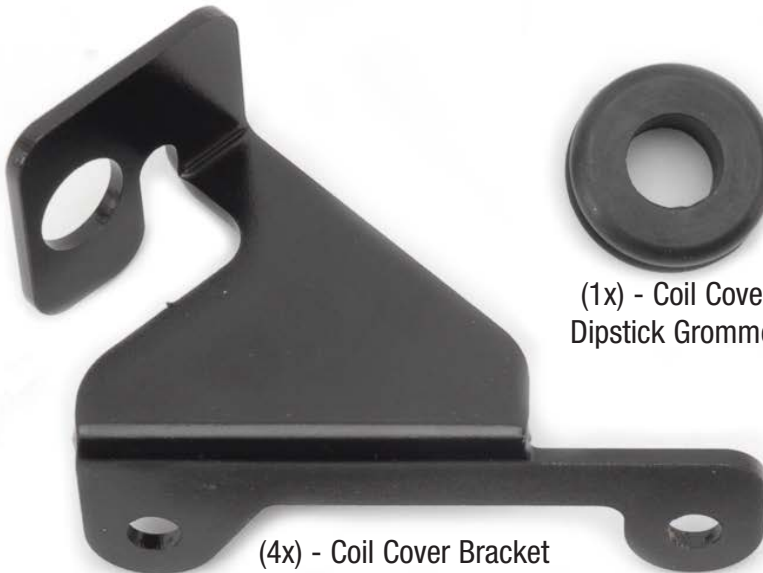

(1x) - Coil Cover  
Dipstick Grommet

(4x) - Coil Cover Bracket




(4x) - Coil Cover Retainer Stud


(4x) - Coil Cover Standoff



**HOSE IDENTIFICATION GUIDE**

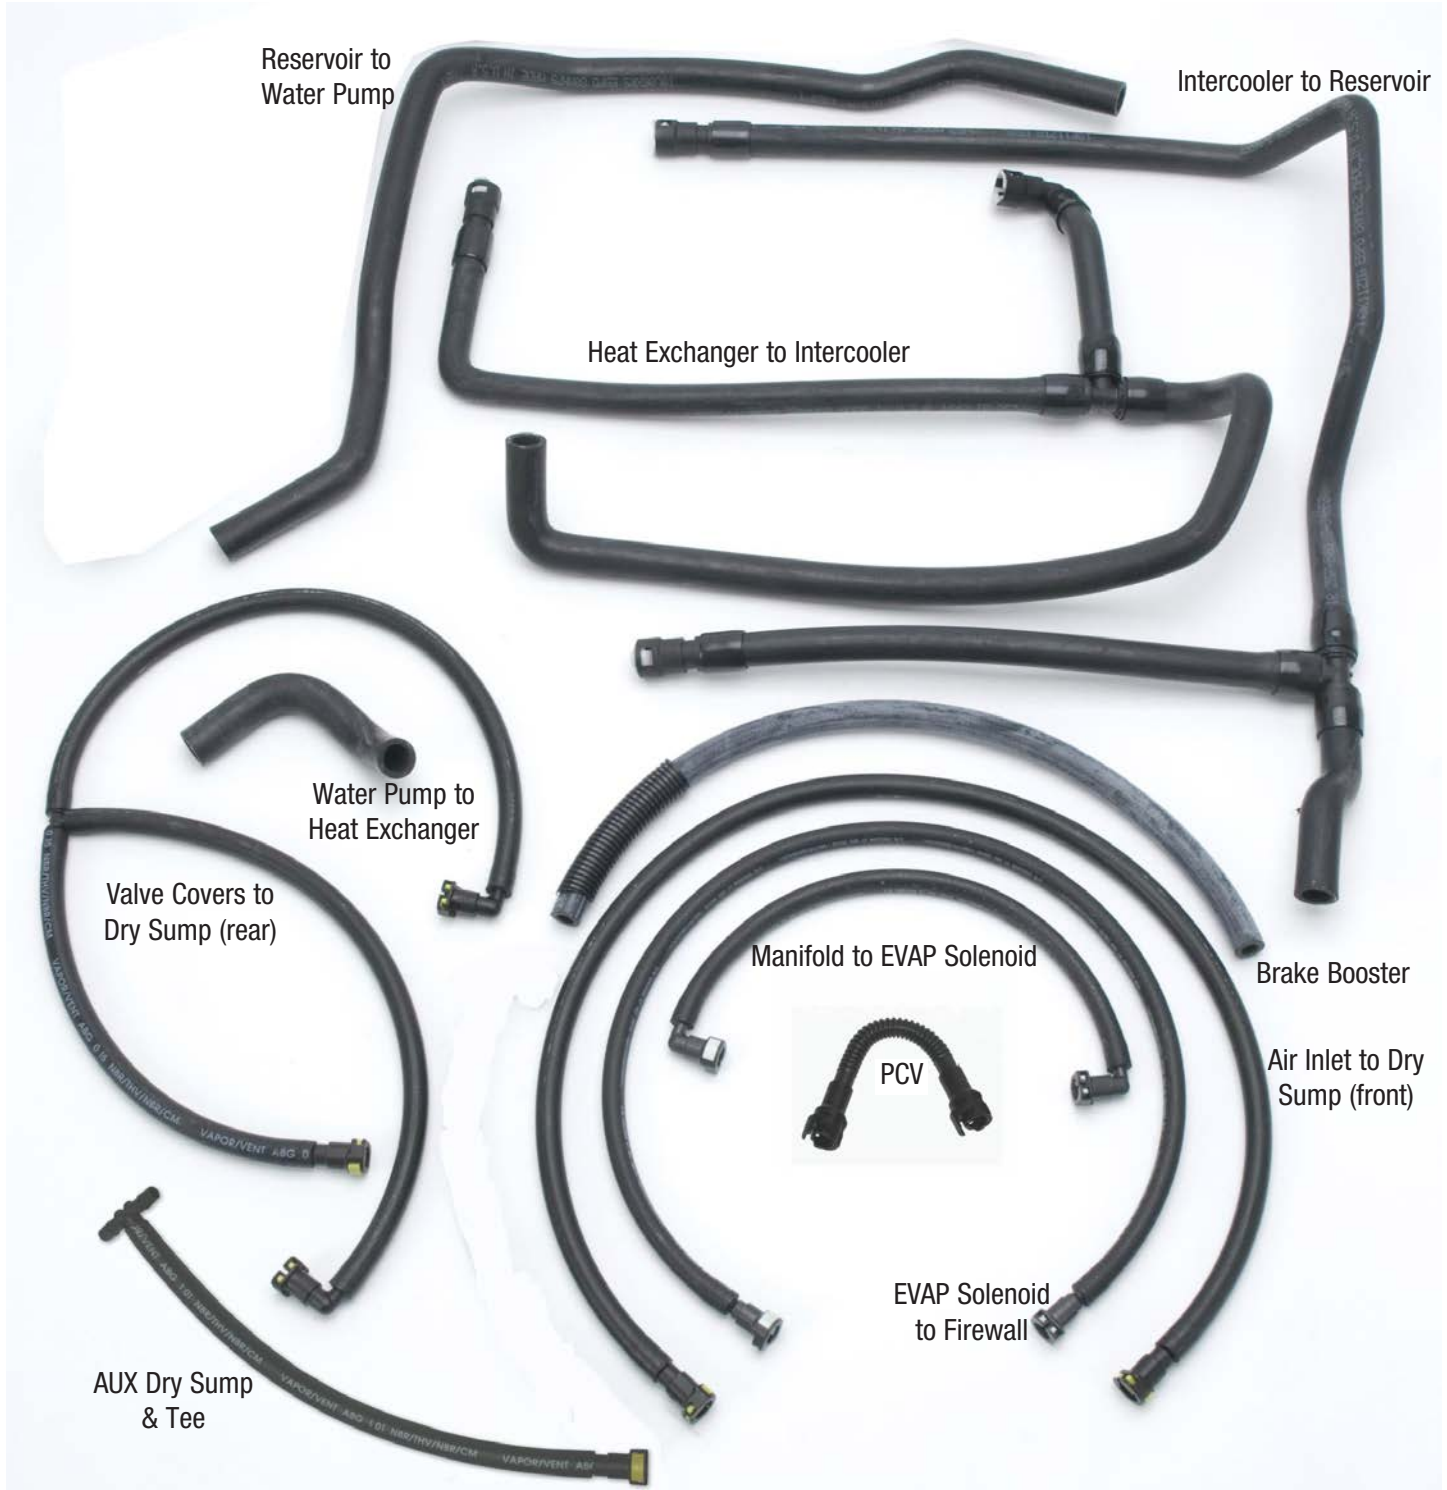


**DRY SUMP ROUTING GUIDE**

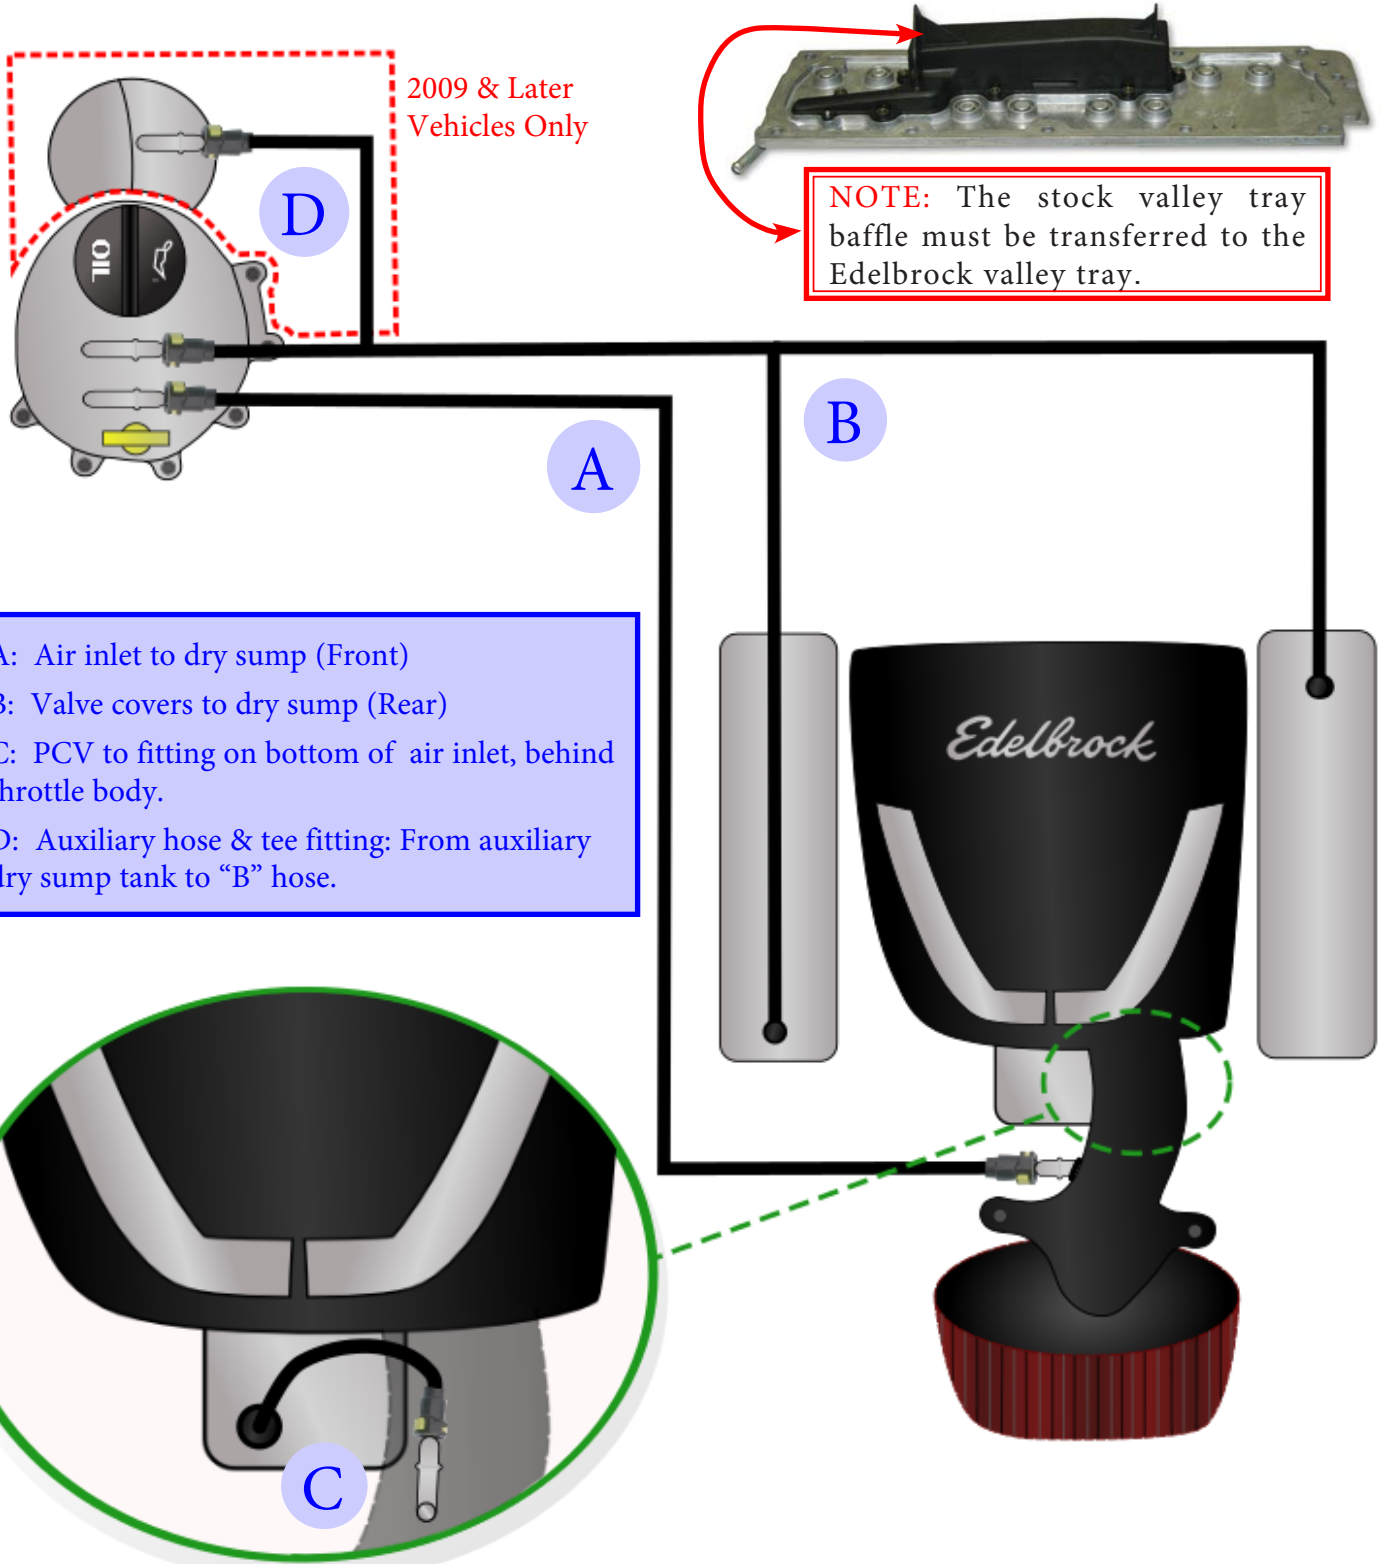



**OIL COOLER GUIDE**

- Oil Cooler to Block Flex Hose & Convolute (1)
- Oil Cooler Line (2)
- Oil Cooler Line to Upper Radiator Hose (3)
- Oil Cooler (4)
- Oil Cooler Bracket (5)
- Freeze Plug w/ Quick Connect Provision (6)
- 5/8" Hose to Block Freeze Plug Adapter (7)
- Low Oil Cooler 90° Swivel, -8AN to 5/8" Fitting (8)
- Oil Cooler Fitting - QC to 5/8" Barb (secure with 5/8" spring clamp) (9)
- Straight Fitting (secure with two (2) 5/8" spring clamps) (10)

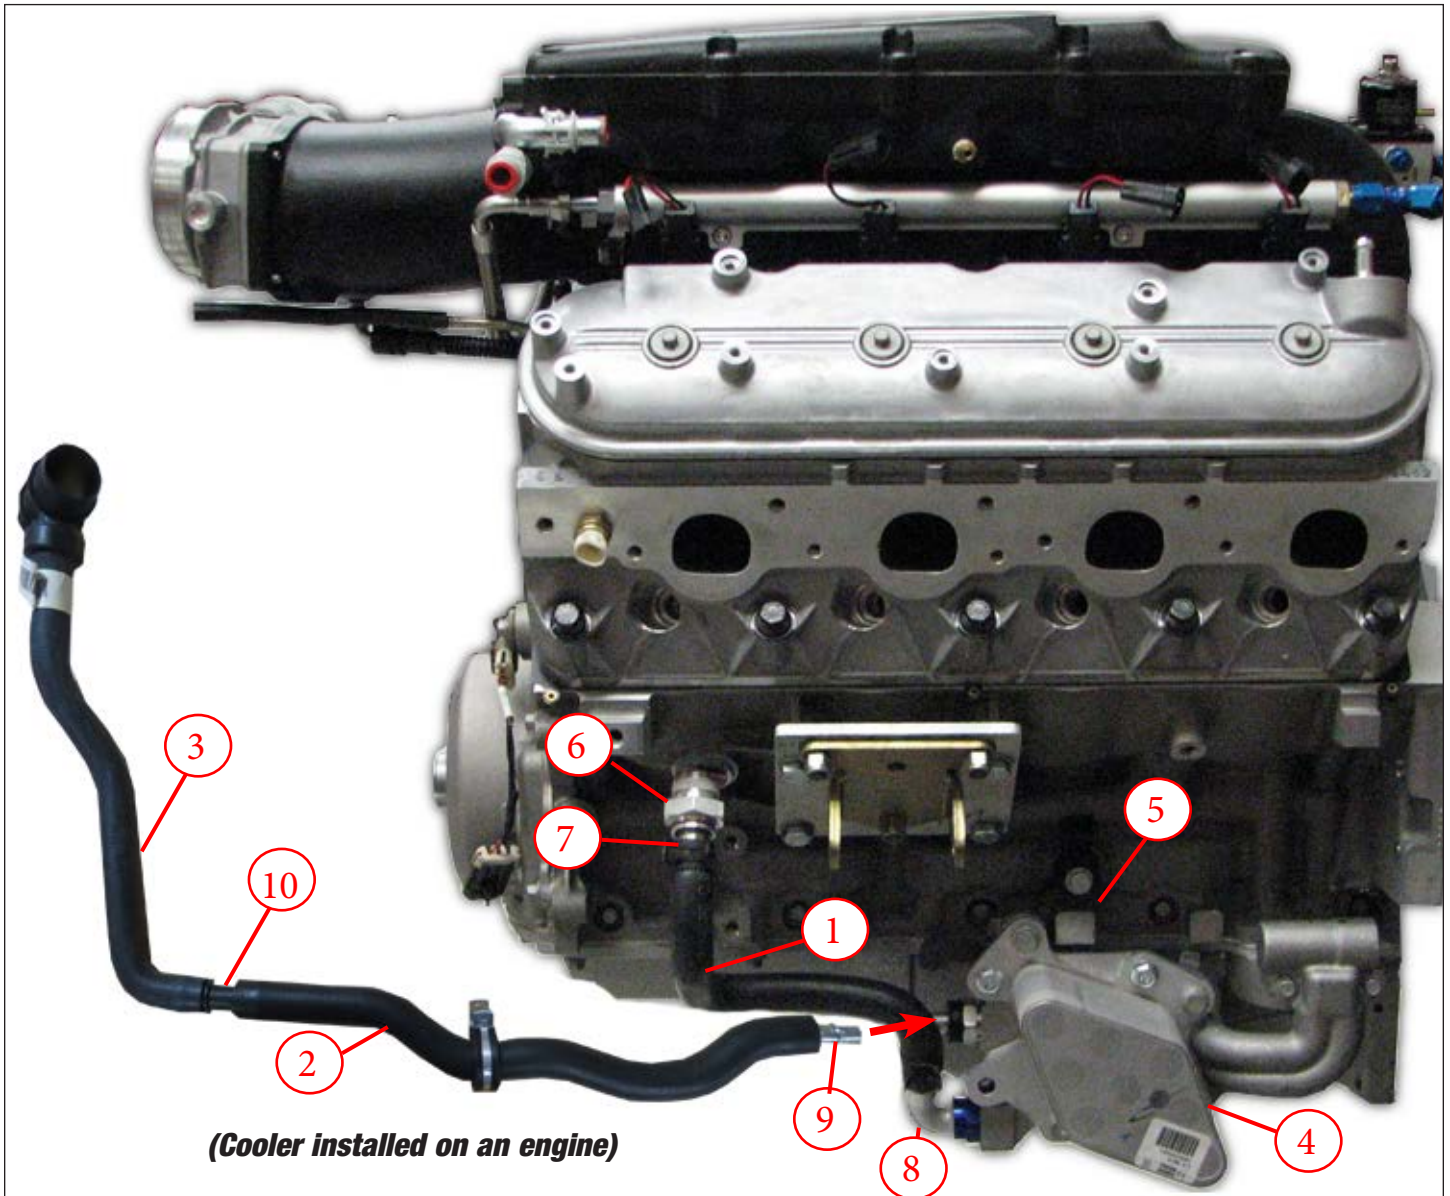


### Supercharger Installation

**WARNING: Battery must be sufficiently charged before starting the PCM flashing procedure.**

**Only begin the PCM flashing procedure when you have downloaded the calibration file from the Edelbrock Calibration Team to the handheld programmer. Do not flash the PCM until you are ready to install the supercharger. Once the PCM is flashed, DO NOT START the engine until the installation of the E-Force supercharger is complete.** Put the car into ACC mode, but don't start the vehicle.

1. Connect the supplied PCM cable on the handheld programmer to the OBD-II connector located below the steering wheel, and to the left of your knee.

2. Use the directional pad to highlight the Program Vehicle option and press the Select button.

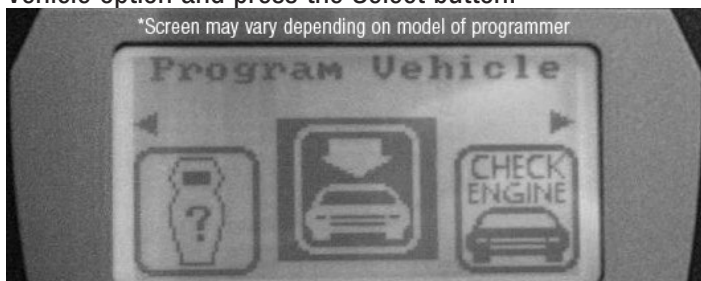

3. Use the directional pad to highlight the Pre-programmed Tune option and press the Select button.

4. Read the disclaimer then press Select to continue.


5. Verify that the ignition is in the 'Key On' position and that the engine is not running, then press Select.

6. Use the directional pad to highlight your vehicle and transmission combination then press Select.

7. Use the directional pad to highlight the Begin Program option then press Select.

8. Depending on your specific drivetrain configuration, several separate operations may take place during this step. Completion of each operation will cause the progress bar to reset to zero.

9. DO NOT unplug the programmer until prompted.

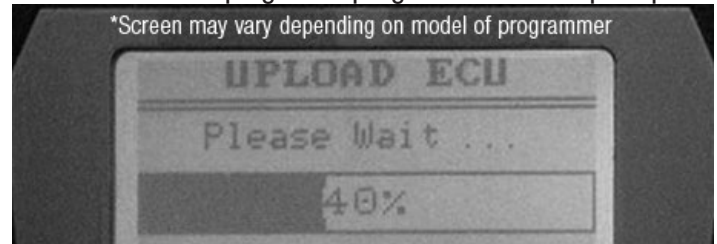

10. Turn the vehicle off when prompted to do so by the handheld programmer.

11. Read the parting message from programmer then press Select to continue.

12. Unplug the programmer cable from the OBD-II port. This concludes the PCM flashing procedure. DO NOT start the engine until the supercharger installation is complete.

13. Use a 10mm socket to remove the negative and positive battery terminals.



14. Use a 13mm socket and an extension bar to loosen and remove the battery hold down.



15. Remove the battery and set it to aside.



16. Use a 7mm wrench to remove the four bolts retaining fascia center.




17. Lift and support the front end of the vehicle using a jack and appropriately load rated jack stands then loosen and remove the lug nuts from both front wheels. Remove the wheels and set them aside.

18. Use a panel puller to remove the 7 body pins on each side that retain the inner fender wells. (Note: Some trim packages use screws in place of pins along outer edge.)



19. Pull back the inner fender well to access the two bumper studs on each side. Use a 10mm deep socket to remove the nuts.

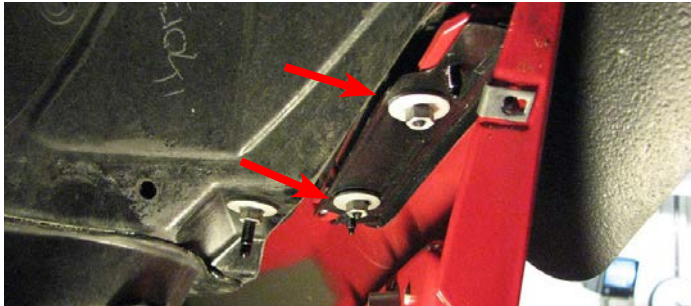

20. Disconnect the indicator and fog lamp electrical connectors.



21. Remove the three screws and one body pin that retain each front valance.



22. Remove the five 7mm and two 10mm nuts retaining the fascia from below.



23. Remove four body pins (two on each side) by reaching up through the bottom of the fascia.




24. Place multiple layers of masking tape on the nose of the hood as well as the portion of the front fascia directly below the hood to protect from damage during removal.



25. The sides of the fascia can be pulled away from the clips holding it in place, then down off the studs. The center section must be pulled up and over the nose section, and the whole assembly pulled straight off and set aside.




26. Disconnect the Mass Airflow Sensor connector.

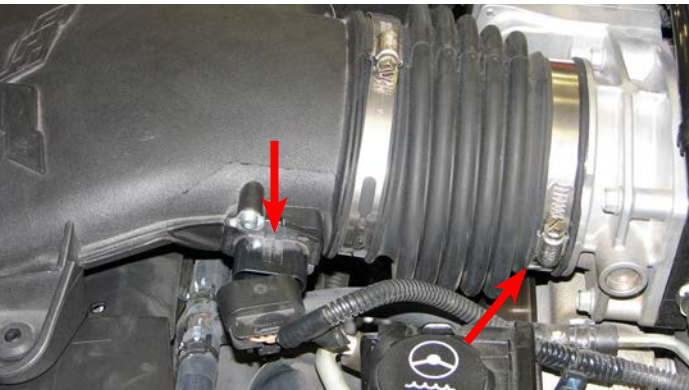

27. Use a flat head screwdriver to loosen the Throttle Body to inlet tube worm clamp.

28. Disconnect the PCV tube from the air inlet tube.

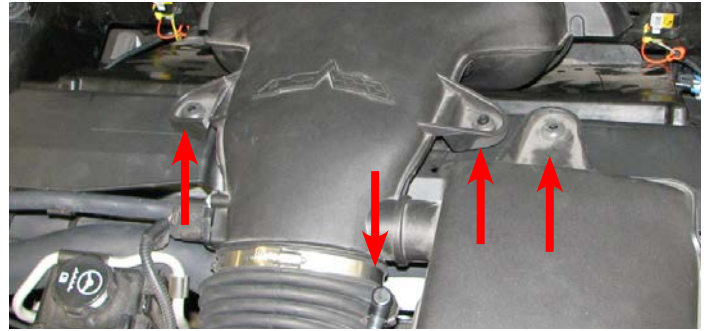

29. Lift the airbox and resonator tube off the locator pins and remove it and the air inlet tube as an assembly.


30. Use a 16mm socket and a breaker bar to turn the tensioner until the serpentine belt has enough slack to remove it.



31. Remove coil covers from valve covers by lifting up and working fuel line through slot on driver side.


32. Disconnect the Electronic Throttle Control connector on the passenger side of the throttle body.

33. Use a 10mm socket to remove the four bolts holding in the throttle body and set it aside.

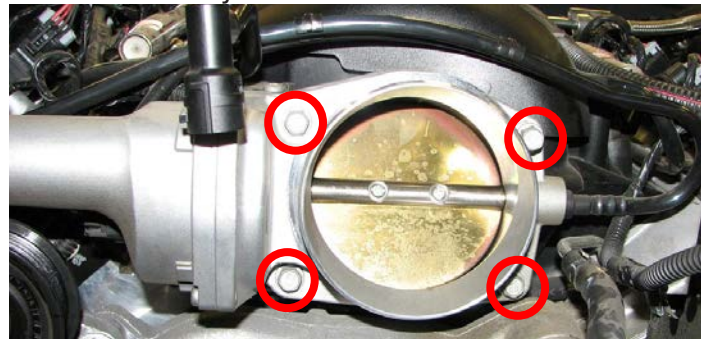




34. Disconnect the ignition coil harness and O2 sensor connectors then disconnect the spark plug wires from the ignition coils.

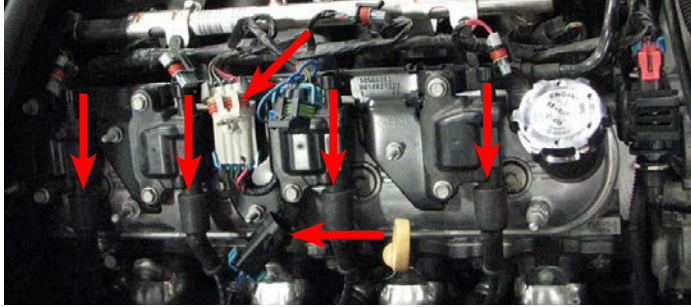


35. Use a 10mm socket to remove the five bolts retaining the coil bracket on each valve cover then remove both coil bracket assemblies.

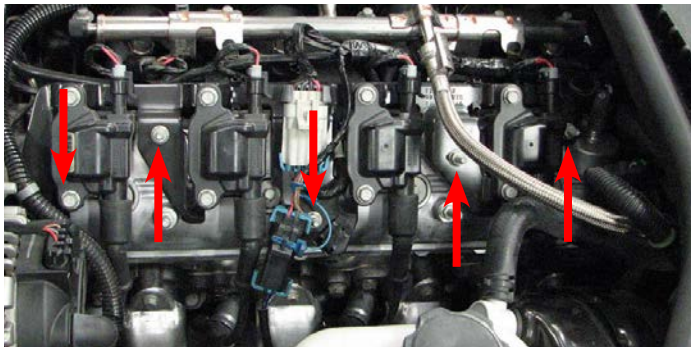


36. Use a fuel line removal tool to disconnect the fuel line from the rails using a shop rag to absorb excess fuel.

37. Disconnect and remove the hose connecting the passenger and driver side valve covers to the rear dry sump tank fitting.

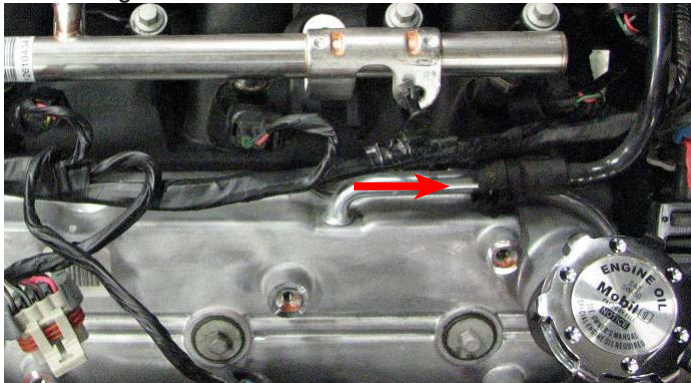

38. Disconnect all eight fuel injector connectors.

39. Use a 10mm socket to remove the four fuel rail bolts.

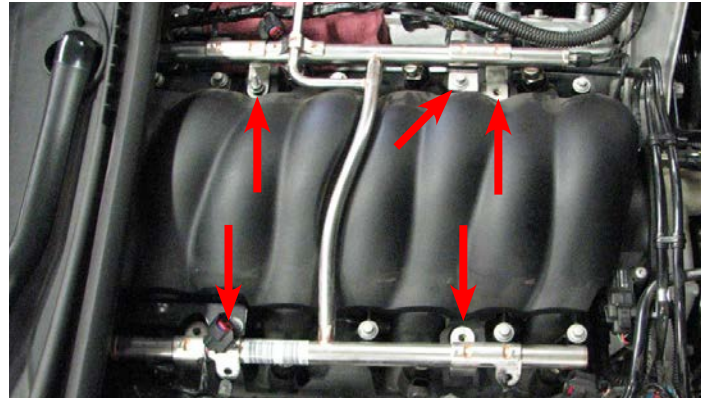

**NOTE:** You will also need to remove one 8mm manifold bolt and bracket before removing the fuel rails.

40. Lift the injectors out of the manifold and work the rails forward until they can be set aside.

41. Use an 8mm socket to loosen the two rear passenger side manifold bolts. Slide the manifold cover out from under the bracket that those bolts retain, and remove it.




42. Use a 10mm socket to remove the seven remaining manifold bolts (out of ten).

43. Disconnect the EVAP solenoid electrical connector.






44. Disconnect MAP sensor electrical connector.

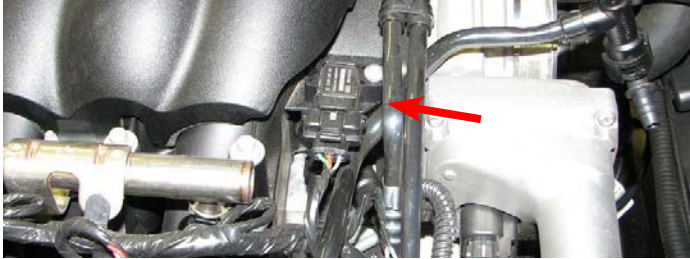

45. Disconnect the vacuum hose from the brake booster fitting; it will be removed with the manifold.



46. Disconnect and remove the two EVAP tubes located at the front of the manifold.

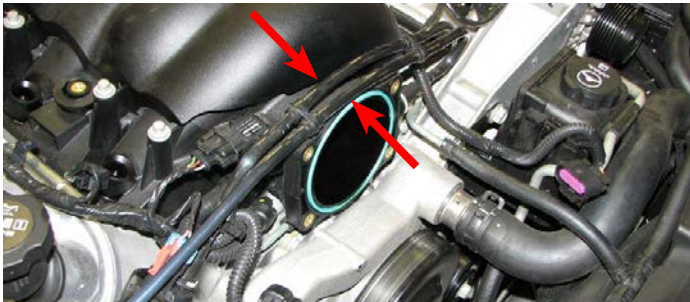

47. Disconnect passenger side PCV tube from valley plate.



48. Remove the intake manifold and disconnect the small vacuum hose at the rear of the manifold next to the larger brake booster hose. Leave this hose connected to the firewall as it will be reused later.

49. Use masking tape to cover the exposed intake ports on the cylinder head.

50. Remove the o-ring port gaskets from the stock intake manifold and set them aside for reuse later.


51. Use a 15mm socket to remove the two bolts retaining the belt tensioner.



52. Disconnect the oil pressure sensor electrical connector at the rear of the valley plate.

53. Use a 27mm wrench to remove the oil pressure sensor from the rear of the valley plate.

54. Clear engine valley of all debris then use a 13mm socket to remove the 11 bolts retaining the valley plate and remove it.

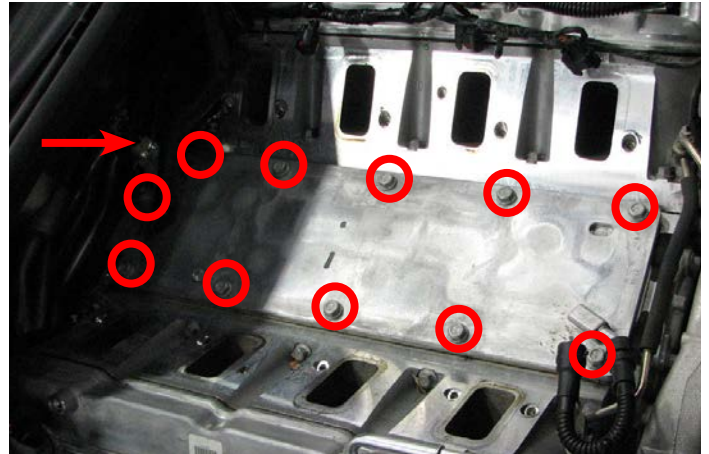

55. Use a small flathead screwdriver to remove the eight O-ring seals from the stock valley plate and install them in the new valley plate. Remove the bolts retaining the stock oil baffle to the stock valley plate then use a small screwdriver to pry off the baffle. Clean any remaining silicone off the mating flange, apply fresh silicone then install the stock baffle onto the underside of the new valley plate using the stock bolts coated with blue Loctite.




56. Apply anti-seize to the tapered surface beneath the heads of the countersunk bolts supplied in Bag #3 and install the valley plate with the stock perimeter gasket. Tighten the bolts from the center out with a 5mm allen tool then torque them to 18 ft-lbs in the same sequence.

57. Install the oil pressure sensor into the supplied valley plate with thread sealant and a 27mm wrench. Torque the sensor to 15 ft-lbs.

58. Reconnect the oil pressure sensor electrical connector at the rear of the valley plate.

59. Use a 15mm socket to remove the bolt retaining the EVAP solenoid.

60. Use a 10mm socket to remove the four bolts (two on each side) retaining upper radiator shroud and remove.

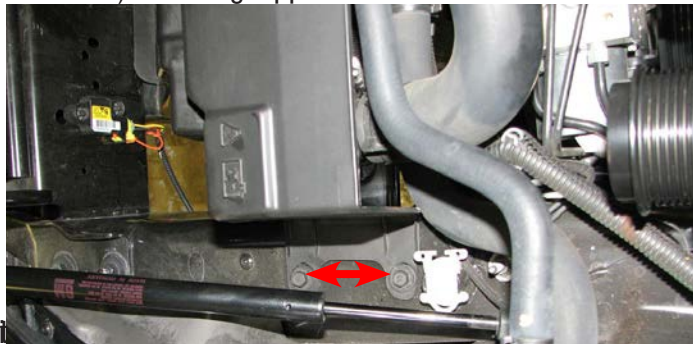

61. Drain the engine oil from the oil pan and remove the oil filter.


62. Use the DT-47731 Transmission Cooler Quick Disconnect Tool to detach two oil lines from the oil cooler.

63. Remove the two bolts on the driver side holding the oil cooler to the shroud.


64. Remove the nut holding the oil cooler bracket to the shroud and remove the cooler.

65. Trace the oil cooler lines back to the oil pan and disconnect them, then remove the lines as a single assembly. The bolts can then be discarded.


66. Remove the retaining body pin located on each side of the radiator shroud. (Passenger side shown).

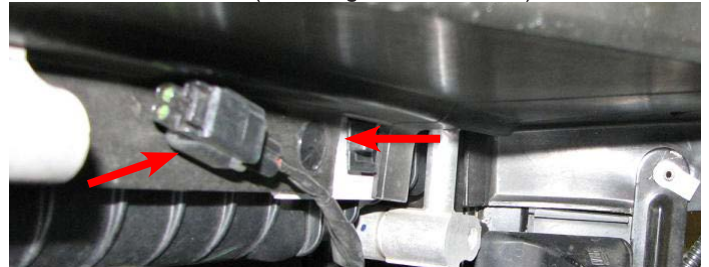

67. Disconnect the ambient air temperature sensor and remove the sensor clipped to passenger side of shroud.

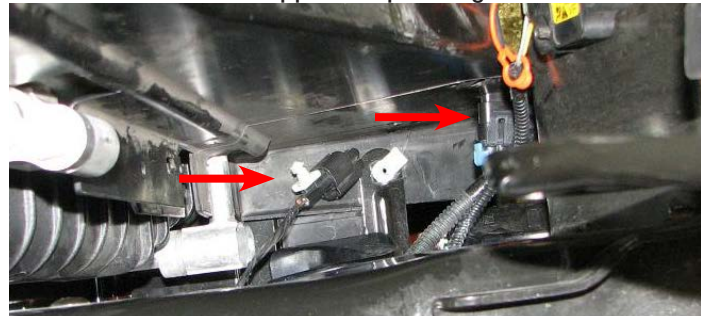


68. Reach up from below the car to remove the two remaining body pins retaining the front radiator shroud then remove the shroud by pulling it down and out.

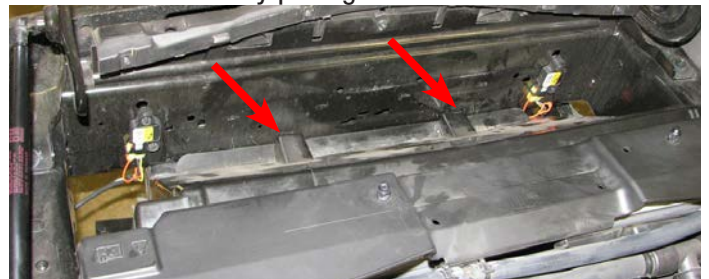



69. Disconnect the radiator fan electrical connector, then use a 10mm socket to remove the two bolts retaining the fan assembly. Pull the hoses from the six clips holding them to the assembly and remove the fan from below.

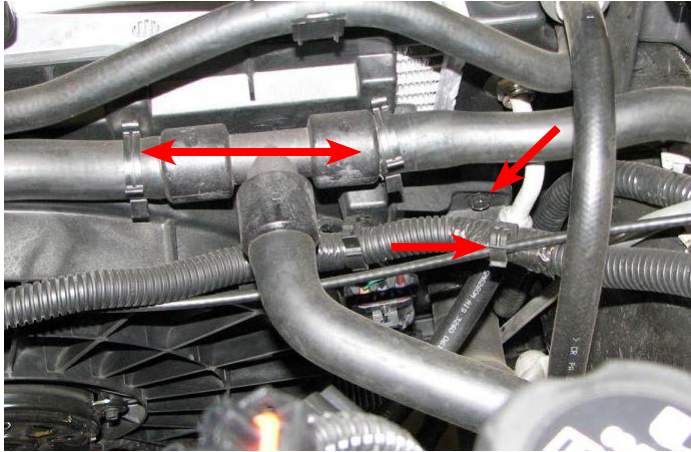

### CRANK PINNING & OIL COOLER INSTALLATION


**CRANK PINNING NOTE:** Some of the following steps, while not strictly related to installing the supercharger, detail the process required for installing a lock pin between the harmonic balancer and the crankshaft nose. The factory design uses a press-on balancer that does not include an anti-rotation mechanism to prevent the balancer from loosening. The additional torque of the E-Force system increases the likelihood of this occurring. Any damage caused by failure to follow this procedure will not be covered by the optional warranty. If you have already had this procedure performed on your vehicle, skip steps 70-104 and 122-138.

**OIL COOLER NOTE:** Installation of oil cooler is explained with in the crank pinning procedure as it is easiest to install once the crank pinning procedure has been completed, but before the steering rack and other parts are reinstalled. If you have already had the crank pinning procedure performed on your vehicle, then the Oil cooler installation (Steps 105-121) can be performed after the supercharger installation has been completed, albeit with a greater degree of difficulty.

70. Use a hand siphon to drain the power steering fluid reservoir.



71. Disconnect the alternator electrical connector.

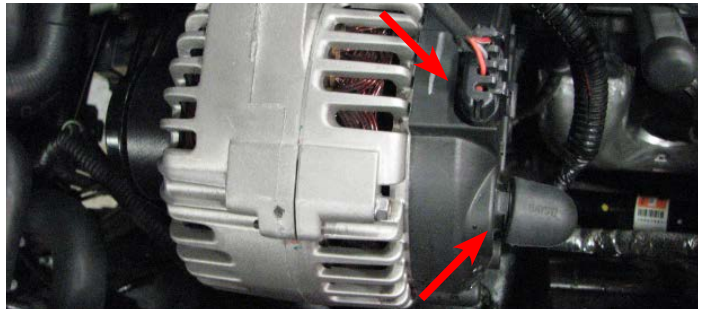

72. Use a 13mm socket to remove alternator power wire.

73. Use a 15mm socket to remove the two alternator support bolts, and then remove the alternator.

**WARNING:** With the wheels of the vehicle facing straight ahead, secure the steering wheel with a steering column anti-rotation pin, steering column lock or strap. Failure to do so may result in damage to or a malfunction of the airbag deployment system.

74. Use an 11mm socket and an extension bar to remove the bolt securing the steering column to the rack then pull the intermediate shaft off the gear. Do not attempt to turn the steering wheel until this bolt has been reinstalled.





75. Use a 6mm Allen tool to hold the tie rod ball stud stationary while using an 18mm wrench to loosen the nut.




76. Use GM Ball Joint Separator #J 42188 to separate the steering knuckle from the tie rod ball stud then remove the tool and the nut. Use this procedure for both sides.


77. Remove the lower nut from the endlink by placing an 8mm wrench on the end of the stud while using an 18mm wrench on the nut. Repeat this procedure on both sides.




78. Use a 13mm socket to remove the four bolts retaining the stabilizer brackets.

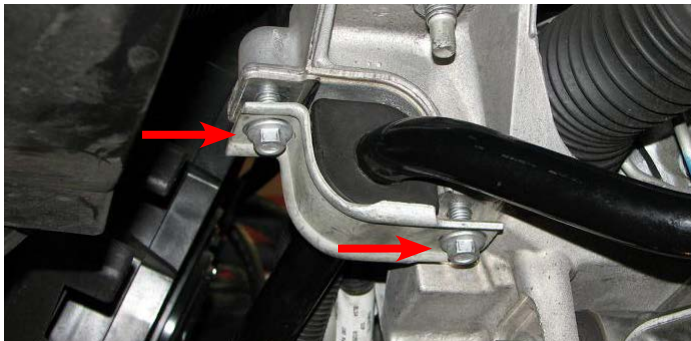

79. Use a 10mm socket to remove the two nuts retaining the brake pressure modulator valve.

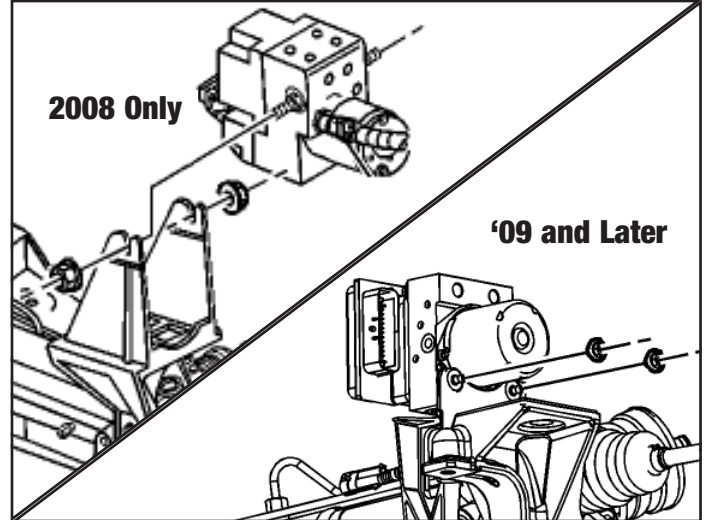

80. Place a catch pan below the steering gear then use an 18mm line wrench to disconnect the two power steering lines from the steering gear.

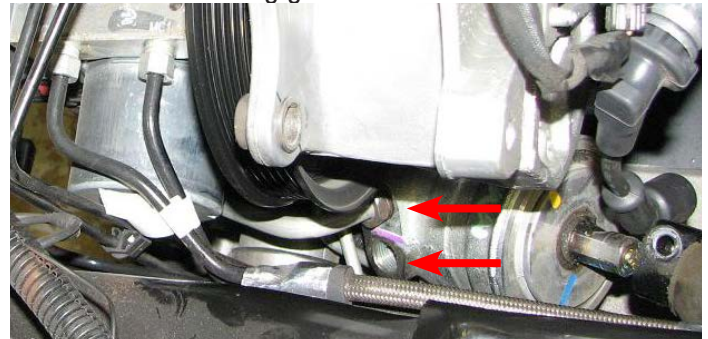


81. Use a 10mm socket to remove the bolts retaining the power steering line brackets or fluid cooler, if equipped.



82. Use a floor jack to support the oil pan.



83. Use a 21mm deep socket to remove the two front engine cradle bolts.

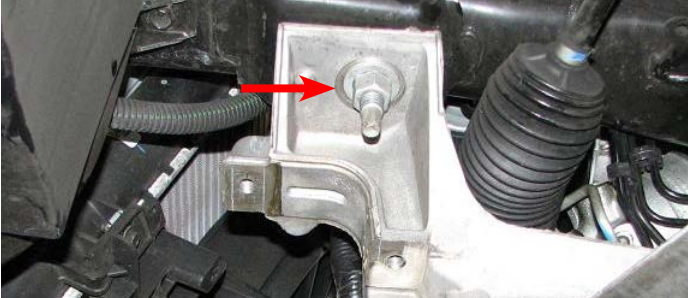

84. Disconnect the ride height sensor electrical connector from each side, if equipped.



85. Use a 10mm socket to remove the driver side brake line bracket bolt.

86. Use a 10mm socket to remove driver side ride height sensor bolt.

87. Use a 13mm socket to remove the lower brake modulator bracket bolts.




88. Use an 18mm socket to remove the two steering rack nuts and bolts.



89. Remove the plastic clamp holding the power steering lines to the steering rack.

90. Loosen the rear engine cradle nuts with a 21mm deep socket and lower them until there is a gap of 10mm from the cradle to the top of the nut.

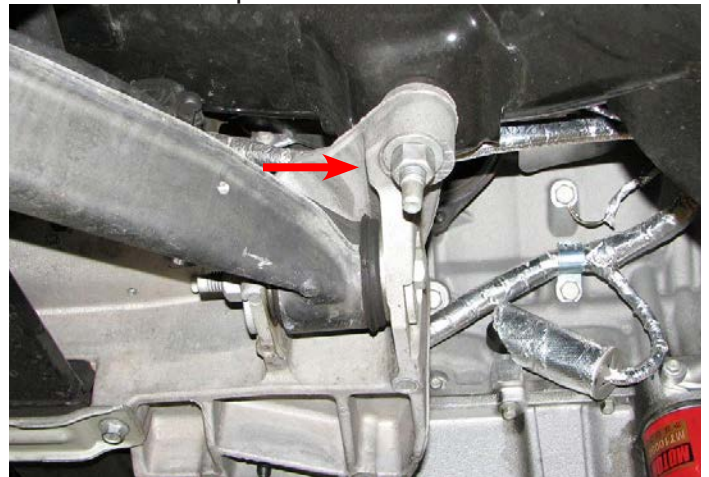

91. Insert a pry bar between the frame and front driver side cradle mount.

92. Work the power steering rack out through the driver side wheel well. Use the pry bar to widen the gap when needed and push the brake lines out of the way to clear the gearbox.



**NOTE:** The following six steps detail the process needed to loosen and remove the crank bolt. Manual vehicles have the option of placing a passenger in the car to put the car in first gear and apply firm brake pressure while turning the crank bolt. Do not attempt this optional procedure if the rear wheels are on the ground or vehicle damage and/or injury could result.


93. Disconnect the oil level sensor electrical connector from the passenger side of the oil pan.



94. Use a 10mm socket to remove the starter support bracket bolt.



95. Use a 13mm socket to remove the two starter bolts.

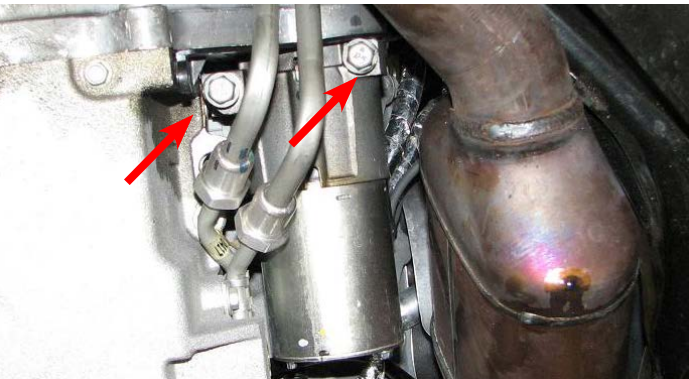

96. Disconnect electrical connector at top of starter, then use a 13mm socket to remove the nuts retaining power wires to the starter.



97. Remove and set the starter and bracket aside.

98. Install GM Flywheel Holding Tool #J-42386-A to prevent the crank from rotating while loosening the balancer bolt and torque the bolts holding it to 37 ft-lbs.

99. Use a breaker bar and a 24mm socket to loosen and remove the crank bolt. A long pipe slid over the breaker bar can be helpful for increasing leverage.



100. Mark off with a piece of masking tape 1.5" from the tip of the supplied drill bit.



101. Use a 24 mm socket to install the supplied bolt and reamer guide to the end of the crank.



102. Lubricate the 15/64" bit supplied in Bag #4 with a small amount of engine oil, then drill into the guide hole with a bushing until the tape mark on the bit meets the guide. Loosen the bolt and blow out any chips with compressed air then turn the guide until the ream hole lines up with the one just drilled in the crank and balancer. Use the back side of the ream tool to verify that the holes line up then tighten the bolt and use the .2500" reamer to ream the hole.

103. Use compressed air to clear out any metal shards in the hole. Apply Loctite 609 retaining compound or equivalent to the supplied crank pin then tap it into the drilled hole until it is flush.



104. Install the supplied GM crank bolt into the crank and torque it to 37 ft-lbs, then rotate it an additional 140°

**NOTE:** Refer to the Oil COOLER Guide on Pg.9 for identification and placement of the following components.

105. Remove the wire harness holding clamp from the gap between the driver side motor mount and the block.

106. Remove the e-clips securing the stock oil lines to the distribution block located directly above the oil filter then pull out discard the stock oil lines.

107. Use a 10mm socket to remove the distribution block from the side of the oil pan and discard it.



108. Use a 10mm socket to remove the two center oil pan rail bolts.

109. Place a wide drain pan below the driver side of the crossmember. Even if the coolant has been previously drained, there will still be a significant amount remaining in the block.

110. Use a 17mm Allen socket and a 1/2" breaker bar to remove the threaded freeze plug located on the driver side of the engine block near the front of the engine.

111. Install the supplied threaded fitting into the hole previously occupied by the freeze plug.

112. Use a 13mm wrench to loosen the knock sensor then re-clock it so that it will clear the new oil cooler. Tighten the sensor back down once it is correctly positioned.

113. Install the male nipple fitting into the short rubber hose and secure it with a spring clamp. Install the supplied convolute over the hose then route it between the driver side engine mount and the block and push the nipple into the fitting in the block.

114. Attach the upper radiator hose to oil cooler hose (3) to the supplied oil cooler line (2) using the straight fitting (10) and secure with 5/8" spring clamps. Then insert the supplied QC to 5/8" fitting into the end of the oil cooler line (2) and secure with a 5/8" spring clamp.

115. Lower the newly assembled water line down near the upper radiator hose and route it so that it will pass in front of the steering rack and between the engine mount and the block so that the fitting is near the oil filter.

116. Attach the bracket to the cooler using the supplied bolts. Apply a dab of lube to the O-ring on the 90° swivel fitting and insert it into the lower provision of the cooler.





117. Attach the short water line from the block to the 90° swivel fitting and secure it with a spring clamp. Make sure the hose clamp is clocked outboard in such a way that it won't interfere with the installation of the hard line.

118. Push the fitting on the end of the oil cooler line into the upper provision of the oil cooler until it clips into place.

119. Mount the oil cooler to the oil pan and loosely install the two supplied and two stock oil pan bolts. Tighten all four mounting bolts and torque them to 18 ft-lbs.



120. Approximate the best location to remove a 1 inch segment of the upper radiator hose to allow fitting installation.

121. Cut out the 1 inch segment of the upper radiator hose previously identified and install both remaining ends onto the tee fitting. **It will be necessary to re-clock the hose segment extending from the water pump outlet in order to attach it to the tee fitting.** Secure both ends to the tee fitting with the supplied clamps.

122. Slide the steering rack back into place and reconnect the electrical connector.

123. Use an 18mm socket to reinstall the steering rack nuts and bolts then torque them to 74 ft-lbs.

124. Reinstall the front crossmember nuts then use a utility jack to lift the crossmember. Torque all four crossmember nuts to 81 ft-lbs.

125. Use a 13mm socket and the stock bolts to reinstall the brake modulator bracket then torque them to 20 ft-lbs.

126. Use a 10mm socket and the stock bolts to mount the brake pressure modulator to the bracket and torque them to 106 in-lbs.

127. Use a 10mm socket and the stock bolts to reinstall the power steering line brackets.

128. Use an 18mm line wrench to reinstall the power steering pressure and return hoses to the steering gear then torque the fittings to 20 ft-lbs.

129. Use a 10mm socket to reinstall the driver side ride height sensor then plug in the electrical connector.

130. Use a 13mm socket and the four stock bolts to reinstall the stabilizer and the brackets supporting it then torque the bracket bolts to 43 ft-lbs.

131. Use an 8mm and an 18mm wrench to reattach the stabilizer bar end links to the control arms then torque the nuts to 56 ft-lbs.

132. Use a 6mm Allen tool and an 18mm wrench to reattach the tie rod ends to the control arm. Tighten the nut to 22 ft-lbs. then rotate it an additional 120°.

133. Reattach the steering column to the rack then use an 11mm socket to torque the stock bolt to 20 ft-lbs.

134. Reinstall the locating clamp around steering rack.

135. Reinstall the alternator, attaching the power wire and electrical connector then torque bolts to 37 ft-lbs.

136. Insert starter support bracket and bolt it in place.

137. Reattach the starter electrical connector and the power wires. Torque the power wire nuts to 71 in-lbs. Reinstall the starter then use a 13mm socket to torque the two bolts that hold it in place to 37 ft-lbs.

138. Apply blue loctite to the threads of a 20mm bolt supplied in Bag #1, then use a 12mm socket and the supplied washer to mount the pulley on the new lower idler bracket and torque it to 18 ft-lbs.




139. Use a 10mm socket to remove the three bolts on the passenger side of the water pump.



140. Use a 6mm Allen tool and the three 90mm bolts supplied in Bag #1 to install the lower idler bracket on the water pump then torque them to 18 ft-lbs.



141. Use a 15mm socket and the two stock bolts to mount the new tensioner bracket onto the water pump then torque them to 37 ft-lbs.

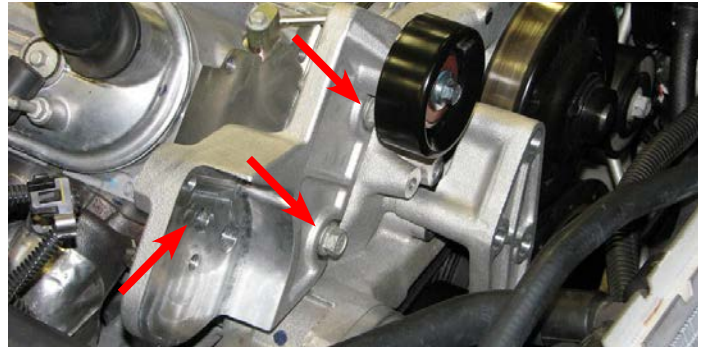

142. Use an 8mm allen tool to install the 45mm bolt supplied in Bag #1 that retains the tensioner bracket to the cylinder head and torque it to 37 ft-lbs.

143. Apply blue loctite to the threads of a 20mm bolt supplied in Bag #1, then use a 12mm socket and the supplied washer to mount the pulley on the tensioner bracket and torque it to 18 ft-lbs.

144. Use a 15mm socket and the 75mm bolt supplied in Bag #1 to install supplied tensioner on new bracket and torque it to 37 ft-lbs.



145. Use a 12mm socket and a 20mm bolt supplied in Bag #1 to mount the EVAP purge solenoid on the back of the new tensioner bracket.






146. Use a 15mm wrench to remove two bolts retaining the power steering reservoir bracket. Use a pair of pliers or hose clamp tools to disconnect the lower reservoir-to-pump hose. Note that it is not necessary to fully remove the reservoir from the engine.



147. Slide the old bracket off the reservoir then install the supplied bracket using a 15mm socket and the stock bolts. Slide the power steering reservoir onto the new bracket and reattach the lower reservoir to pump hose.

148. Line up the supplied templates on the radiator shroud and drill the appropriate holes, depending on the presence, or absence, of the factory oil cooler.

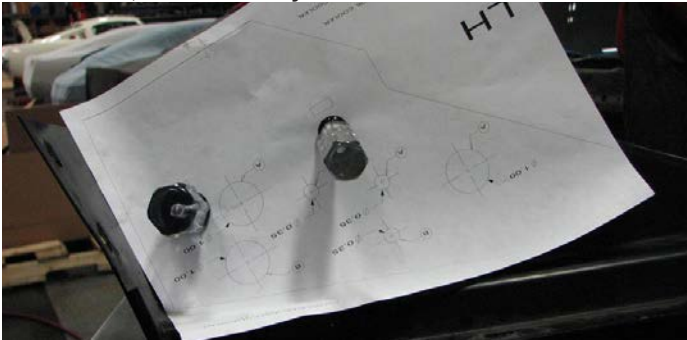

149. Reinstall the radiator shroud by sliding it into place from below then hold it in place using the four stock body pins (two up front, and one on each side).

150. Clip the passenger side sensor back into place and reattach the ambient air temperature sensor connector.

151. Use a 10mm socket to remove center air dam bolt.



152. Disconnect horn electrical connector then use a 10mm socket to remove the bolt holding the horn bracket in place. Remove the horn assembly and set it aside.



153. Use a 10mm socket to install the heat exchanger, using the 20mm bolts supplied in Bag #2 on the side, and the stock air dam bolt on the bottom.



154. Use a 10mm socket to remove the nuts holding the horns to the bracket.

155. Use a small flat blade screwdriver to remove the wire harness connecting the horns and swap the connectors from horn to horn.






156. Use a 12mm socket to install the water pump in its bracket and secure it with the supplied strap.




157. Remove the passenger side lower body pin.



158. Use a 10mm socket to loosely install the water pump bracket using the stock horn bracket bolt on top and the bolt supplied in Bag #3 on the bottom.

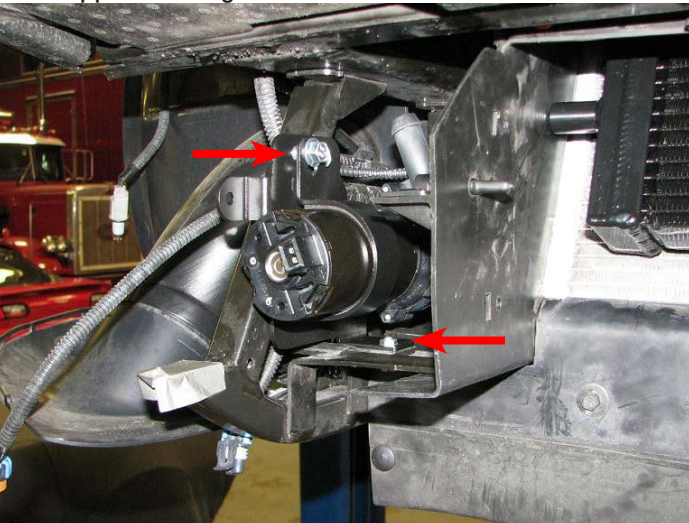

**NOTE:** There are two different water pump brackets: Version (1) requires the use of your OE horn bracket. Version (2) has an integrated horn bracket. You should have received one of the two brackets; If your supercharger kit includes bracket version (2), you may disregard Step 161.

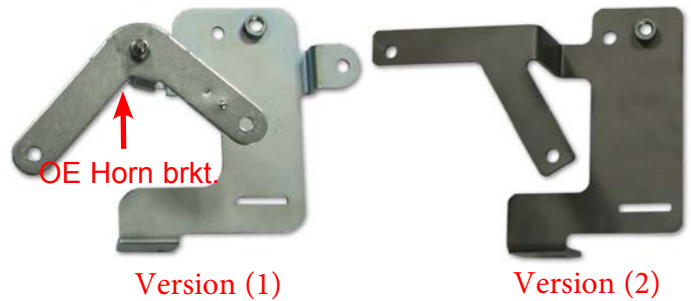

159. **NOTE:** This step only applies to customers who received version (1) of the water pump brackets. Install the supplied stand-off and lock nut onto the OE horn bracket. Proceed by mounting that assembly, with the supplied M6 x 10mm bolt, to the water pump bracket as shown below.



160. Re-install the horns using the OE nuts. Be sure to orient the horns so that there is slack in the horn's wiring harness. **Warning:** Do not mount the horns with the openings facing up, as they may accumulate condensation and cease working.



161. Use the supplied bit to drill a 15/64" hole in the passenger side of the upper radiator shroud according to the supplied template.




162. Use a 10mm socket and the four stock bolts to reinstall the upper radiator shroud then attach the relay off the supplied water pump wire harness to the upper radiator shroud using the supplied body pin. Open and close the hood to verify the relay clears the hood strut.



163. Route the intercooler water pump wire harness extending from the relay down to the intercooler water pump and plug in the connector.




164. Plug the male connector on the T-segment of the harness into the EVAP solenoid then plug the factory EVAP connector into the female connector on the T-segment.

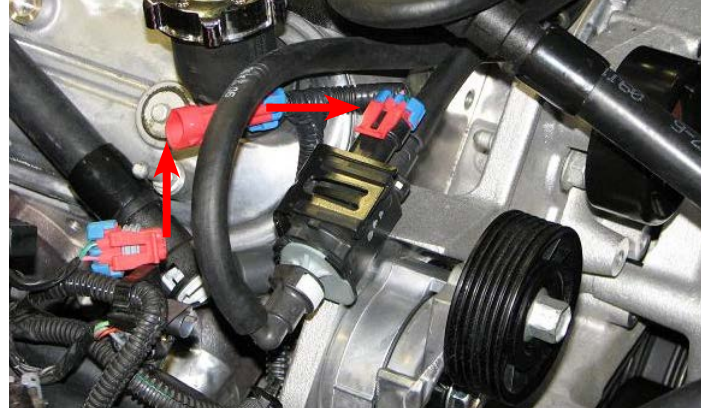

165. Use a 10mm socket and the two stock bolts to reinstall the radiator fan.

166. Attach the radiator fan electrical connector then push the stock hoses back into the factory clips.

167. Install the short molded hose from the outlet of the intercooler water pump to the heat exchanger inlet. Secure the fittings with the supplied hose clamps.

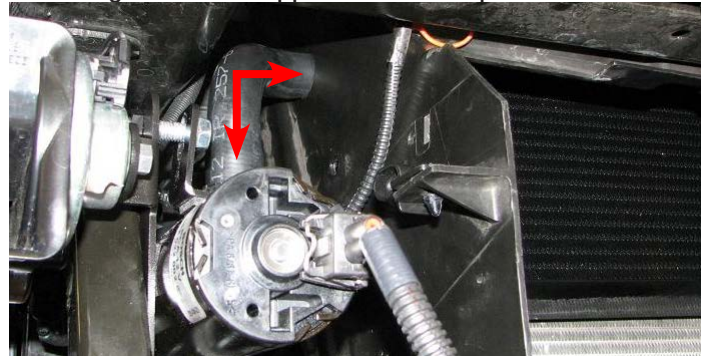


168. Lower the heat exchanger hose assembly along the driver side of the radiator shroud.





169. Connect the heat exchanger hose assembly to the heat exchanger through the hole drilled in the shroud. Secure the fitting with a hose clamp supplied in Bag #2.

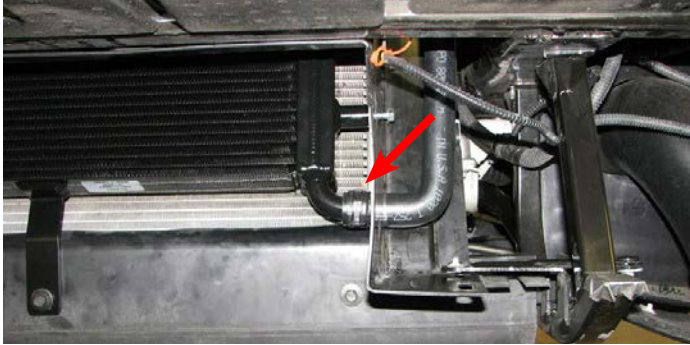


170. Connect TMAP harness to TMAP sensor near rear of manifold.



171. Reinstall the battery and secure it with the stock hold down but DO NOT reconnect electrical terminals.

172. Use a 10mm socket and an extension bar to loosen the two nuts securing the fuse box.

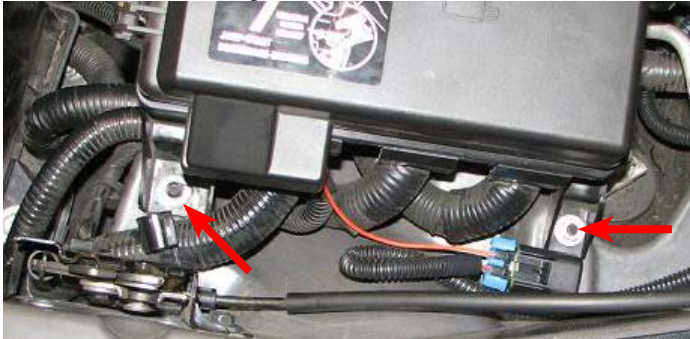

173. Use a 7mm socket to remove the fuse box bolt located in the passenger side fender well.

174. Install the long end of the molded hose onto intercooler reservoir outlet so that the hose extends out and then turns down when the reservoir is held upright. Secure the hose with a hose clamp supplied in Bag #2. Proceed by installing the brackets supplied in Bag #2 with a 10mm socket, as depicted below.



175. Use a 10mm socket to loosen rear hood hold down latch bolt on passenger side fender.



176. Install intercooler reservoir by working molded hose down along the passenger side of the radiator to the water pump inlet and secure the hose on the pump fitting with a hose clamp supplied in Bag #2.

177. Slide intercooler reservoir brackets behind loosened fuse box nut and hood hold down latch bolt. Use a 10mm socket to torque them to 89 in-lbs.

178. Use a 10mm socket to mount fuse on fuse box stud.



179. Use a 13mm socket to attach the harness power wire to the main positive terminal.

180. Use a 10mm socket to attach the ground wire to the ground stud near the relay.



181. Reinstall the fender well fuse box bolt.

182. Install supplied 15/32" hose on brake booster and secure fitting with a hose clamp supplied in Bag #2.

183. Install the stock O-ring port gaskets in the supercharger manifold.



184. Install the supplied Manifold to EVAP Solenoid Hose on the manifold fitting below the hub snout.



185. Clear engine valley of any hoses, wires, tools, etc. Lay the intercooler-to-reservoir tank hose in the engine bay, routed along the firewall behind the oil pressure sensor, and connect it to the intercooler reservoir inlet, securing the fitting with a hose clamp supplied in Bag #2.



186. (Refer to the routing guide on page 8 for a clear depiction of the hose routing procedure described below.) Attach the dry sump breather hose assembly to the driver side valve cover fitting, then route the rest of the hose along the firewall and over to the passenger side. Connect the middle hose section to the passenger side valve cover provision and the straight fitting to the rear dry sump tank fitting. Cut the supplied dry sump hose near the rear dry sump fitting and install the supplied tee adapter in line with that hose. Route the short section of hose extending from the tee adapter to the auxiliary tank fitting and attach it.


187. Remove the tape covering the intake ports. Since two of the stock manifold bolt hole provisions in the cylinder heads break into the crankcase and are not used with this supercharger, install the two button head bolts supplied in Bag #3 in the front passenger side and rear driver side bolt holes to ensure a good seal. With the assistance of one or more people, lift the supercharger assembly onto the engine.



188. Tilt the manifold back slightly to install the small factory vacuum hose running from the driver side firewall fitting on the small fitting on the driver side of the air inlet and the brake booster hose onto the larger fitting then secure the brake hose with a clamp supplied in Bag #2.



189. Use a 10mm universal socket with an extension bar to install the eight intake manifold bolts following the torque sequence below. Torque the bolts to 4 ft-lbs in the first pass, then to 7.5 ft-lbs in the second.

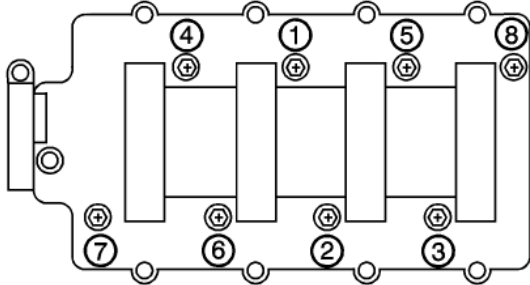

190. Use a 3/8" Fuel Line Removal Tool to remove the fuel input line from the firewall fitting.


191. Take the fuel injectors out of their boxes and remove their protective covers.

192. Apply o-ring lube to the upper injector seals, then slide the injectors into the rails so that the electrical connectors face away from the mounting flange.



193. Apply O-ring lube to the sealing ring of the four supplied fuel rail fittings. Use a 3/4" wrench to install the two straight hose fittings on the radiator side of each fuel rail then install the plug in the firewall end of the passenger side fuel rail and the U-shaped fitting on the firewall end of the driver side rail. Orient the fitting close to the injector, leaving room for the injector connector.

194. Connect Manifold to EVAP Solenoid hose to the outer EVAP solenoid fitting and EVAP Solenoid to Firewall Hose to the inner EVAP solenoid fitting. Route Solenoid to Firewall hose beneath hub snout and along driver side valve cover to firewall fitting and connect it.

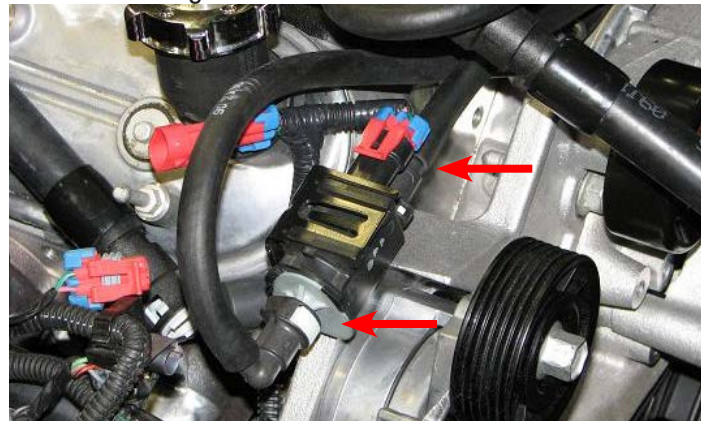

195. Apply O-ring lube to the lower seals of each of the fuel injectors.


196. Attach the supplied fuel rail crossover line to the fitting on the passenger side fuel rail.

197. Install the fuel rails by sliding the injectors down into the manifold provisions and applying pressure until the mounting holes in the rails line up with the manifold. Slide the crossover hose under the snout and air inlet of the supercharger as you install the passenger side rail then connect it to the driver side fuel rail fitting.


198. Use a 5mm Allen tool to install four 12mm fuel rail bolts supplied in Bag # 3 and torque them to 91 in-lbs.



199. Clip the heat exchanger hose assembly to both lower fittings at the front of the supercharger manifold.

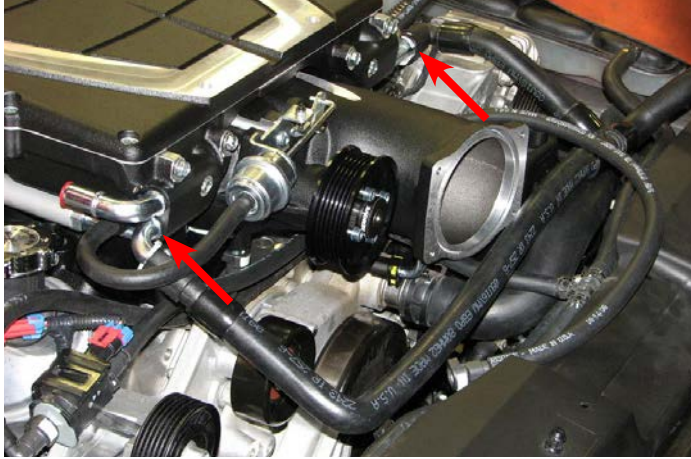

200. Attach one end of the supplied PCV hose to the 90° fitting below the air inlet on the supercharger. Route the other end of the PCV hose to the tube extending from the valley plate and attach

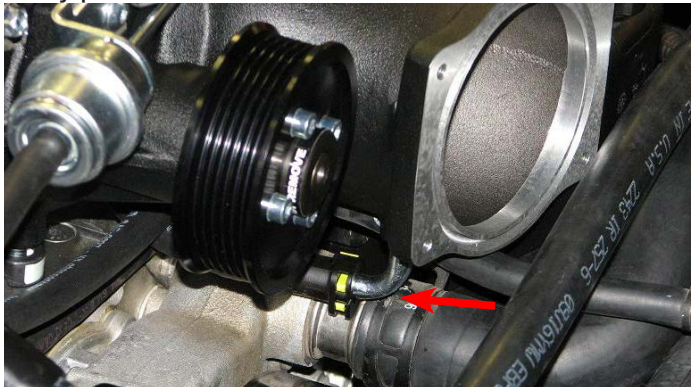

201. Install the supplied fuel line from the firewall fitting to the U-shaped fitting on the driver side fuel rail.



202. Connect fuel injector electrical connectors.


203. Use a small flathead screwdriver to remove the wire covers at the back of the coil brackets. Note that you will need to separate the covers from the bracket, then split the two halves of the cover.




204. Tuck the fuel injector wiring harness and the EVAP Solenoid to Firewall Fitting Hose under driver side coil bracket then use a 10mm socket and the ten stock bolts to install both coil brackets on to the valve covers.

205. Attach the ignition coil connectors and spark plug wires to the coils.

206. Use a 10mm deep socket to remove the four stock coil cover ball studs from the valve covers.

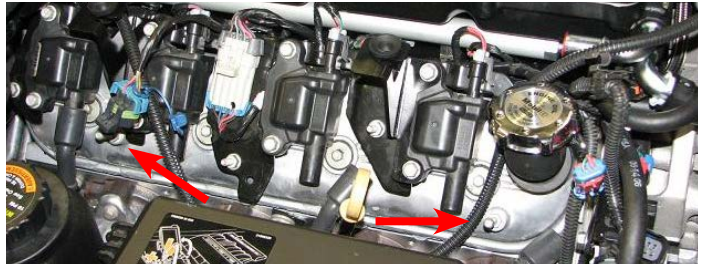

207. Remove the grommets from the stock coil covers.

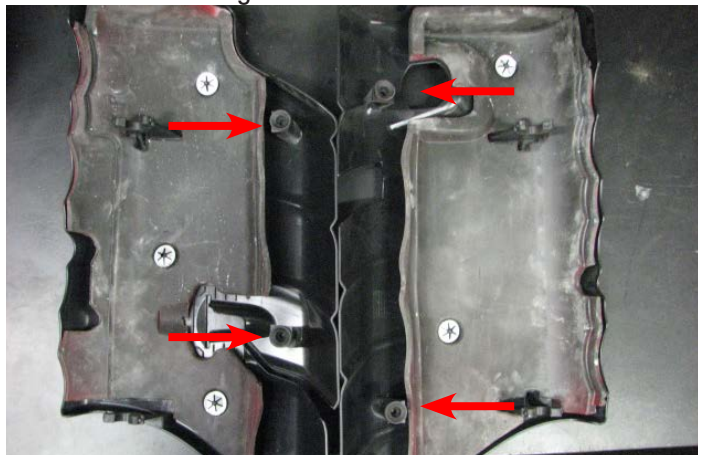



208. Install the stock grommets into the coil cover brackets supplied in Bag #6.



209. Use a 10mm socket to remove the bolts securing the #2, #3, #6 and #7 ignition coils.

210. Install the coil cover brackets on top of the ignition coils, then use a 10mm socket to secure them with the stock bolts.




211. Tuck the wire harness tight against the fuel rails. Verify that nothing will be pinched or damaged when the coil covers are installed.

212. Use a 7/16" deep socket to install the four ball studs supplied in Bag #6 onto the supplied coil covers.

213. Plug the OEM engine harness MAP sensor connector into the supplied MAP harness then route the harness to the vicinity of the air intake.



214. Route the serpentine belt according to the diagram. Note that you must slide the belt around the bottom of the bracket to get the belt on the lower passenger side idler pulley.

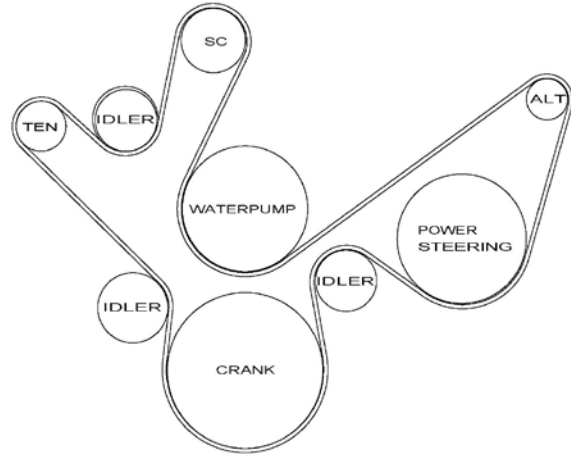


215. Use a breaker bar and a 16mm socket to push the tensioner enough to get the belt on, then double check the routing.

216. Use a 10mm socket, an extension bar, the four stock bolts and OEM seal to install the throttle body. Torque the bolts to 91 in-lbs.



217. Connect ETC harness to the throttle body motor.


218. Connect the intercooler hose assembly to the two upper hose fittings at the front of the manifold.

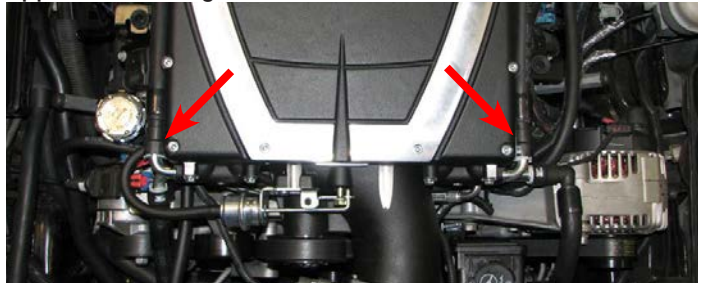

219. Install the silicone inlet tube to the throttle body and secure it with a supplied worm clamp.



220. Install the grommet supplied in Bag #5 into the new air inlet tube.

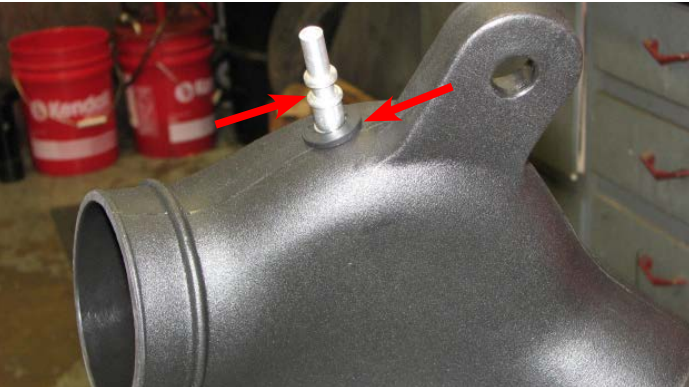

221. Install the hose barb supplied in Bag #5 into the new air inlet tube.



223. Use a T20 Torx driver to remove the MAF sensor from the stock airbox.

224. Use a 3/32" Allen tool and bolts supplied in Bag #5 to install the stock MAF sensor in the new air inlet tube.



225. Route the supplied MAF wire harness near the driver side of the throttle body.

226. Install the two supplied grommets into the ears of the new air inlet tube.



227. Slide the nose of the air inlet tube into the air filter then hold the grommets in place with a socket as you tilt the air inlet tube down into the silicone tube and onto the locator pins.

228. Connect the Air Inlet to Dry Sump hose to the air inlet tube fitting, then route the hose along the passenger side valve cover and connect it to the front fitting of the dry sump tank.







## Edelbrock GM LS3 Supercharger System for 2010-2013 Grand Sport Corvettes PN 1574, 1575 & 1576 Installation Instructions

229. Connect the MAF harness to the MAFS then connect the OEM MAF connector to the supplied MAF harness.

230. Rotate the worm clamps so that the gears are on the driver side then secure the air inlet tube by tightening the worm clamps on the air filter and the silicone hose.

231. Use a 5/8" wrench to install the coil cover stands supplied in Bag #6 onto the valve covers.



232. Use a 10mm socket to reconnect the positive battery terminal.

233. Use a 10mm socket to reconnect the negative battery terminal.

234. Remove intercooler reservoir cap and fill intercooler system with a 50/50 blend of water and coolant.

235. Refill the power steering reservoir with power steering fluid.

236. Reinstall the front fascia and reconnect the fog lamp and indicator light electrical connectors.

237. Secure the front fascia with the stock hardware, including the four bolts under the hood, the two nuts on each fender, the five bolts and two nuts on the underside and the four body pins that clip into the radiator shroud. Refer to steps #18-24 for fastener locations.

238. Reattach the front valances using the three stock screws and one body pin on each side.

239. Secure the front inner fender wells with the stock fasteners.

240. Reinstall the front wheels and torque the lug nuts in a crossing pattern to 100 ft-lbs.

241. Reconnect the battery and switch ignition to the ON position, **DO NOT START**. With the ignition switch on, check for any coolant or fuel leaks. Repair all leaks before proceeding. If no leaks are present the installation is complete.

242. Install the coil covers by sliding them into place and pressing the ball studs into the bracket grommets.

Congratulations on the installation of your new Edelbrock E-Force Supercharger System. If you have any questions, please call our Technical Support hotline and one of our technicians will be happy to assist you.