



2501 Ludelle Street
Fort Worth, Texas 76105
817-244-6212 Phone • 817-244-4024 Fax
888-350-6588 Sales • 800-423-9696 Tech
E-mail: painless@painlessperformance.com
Web: www.painlessperformance.com

30711


RACING SAFTEYCHARGE WIRE PARTS LIST AND INSTRUCTIONS

1 – 25” Roll of TXL 8gauge wire

2 – 3/8 8 gauge ring terminals

1 – 1/4 8 gauge ring terminal

This charge wire is designed to run as a direct wire to charge the battery without tying into the master disconnect. Determine the routing and length desired to specific application. Then using the supplied ring terminals crimp the battery and alternator end on the appropriate ends of the wire. Be sure that all connections are secure. Charge wire should be free of slack or moving parts to avoid chaffing or cuts, this will cause a short in the charging system.

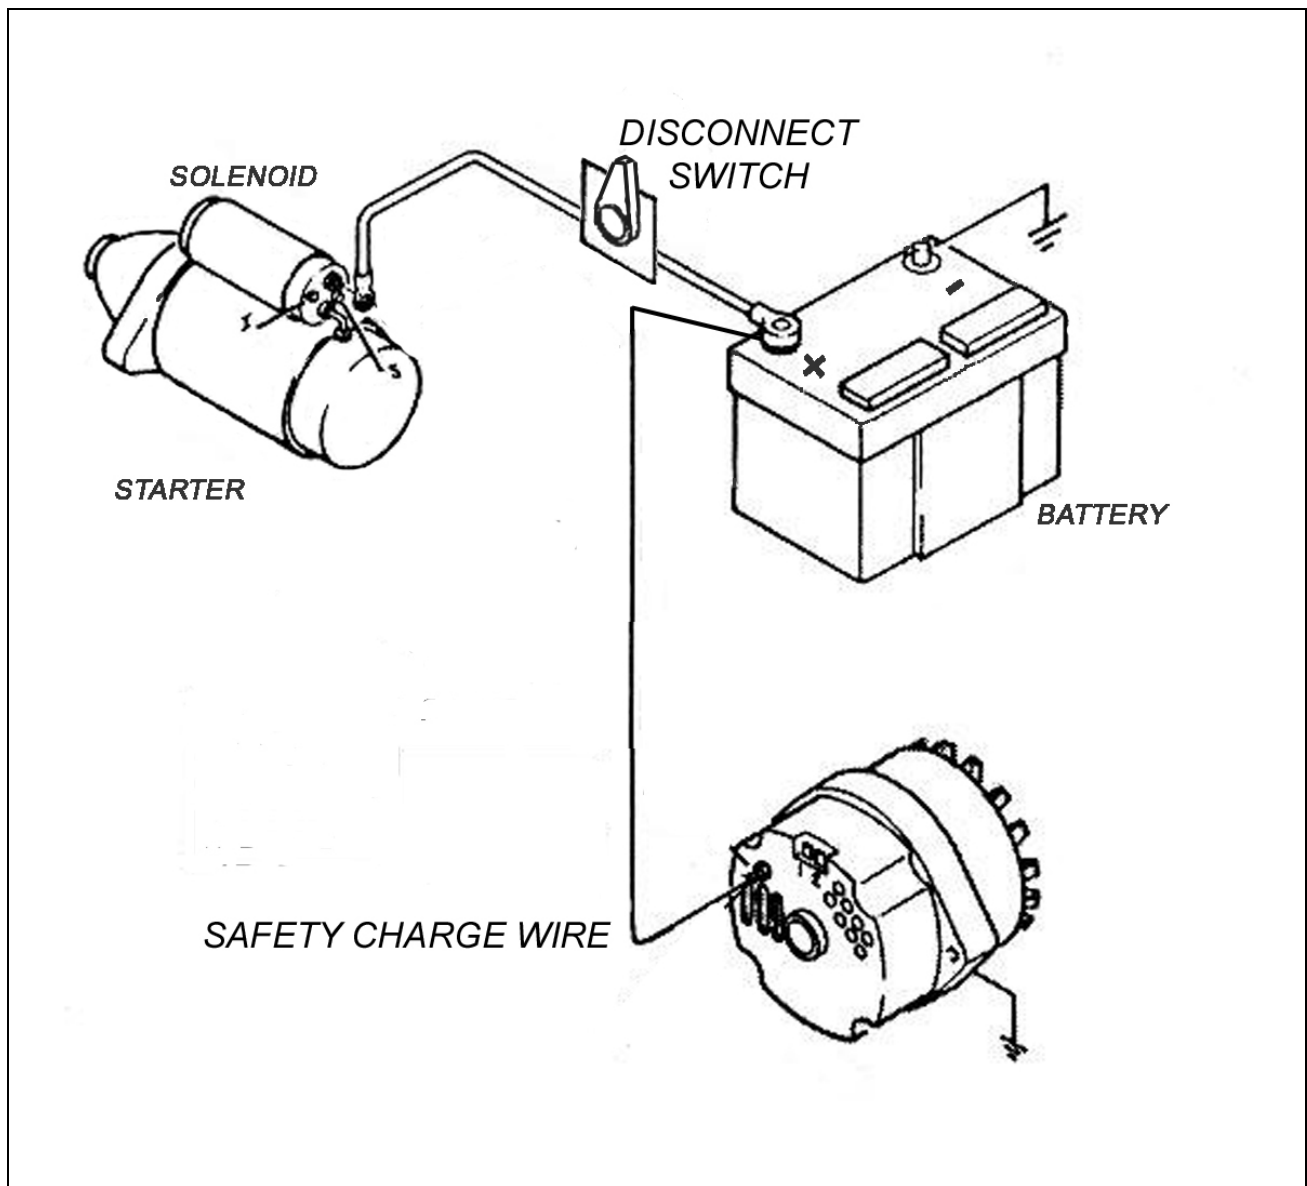

SAFETY CHARGE WIRE ROUTING

Painless Performance Limited Warranty and Return Policy

Chassis harnesses and fuel injection harnesses are covered under a lifetime warranty. All other products manufactured and/or sold by Painless Performance are warranted to the original purchaser to be free from defects in material and workmanship under normal use. Painless Performance will repair or replace defective products without charge during the first 12 months from the purchase date. No products will be considered for warranty without a copy of the purchase receipt showing the seller's name, address and date of purchase. You must return the product to the dealer you purchased it from to initiate warranty procedures.

Copyright © 2007 by Perfect Performance Products, LLC