## INSTALLATION INSTRUCTIONS ANALOG CLOCKS

2650-1480-00 Rev. A



## Installation

- 1. Check that you have all parts required for installation.
- 2. Disconnect the negative (-) battery cable.
- 3. Gauge mounts in a 21/16" hole. Use supplied brackets and nuts to secure to dash.
- 4. Attach black wire from harness to good engine ground.
- 5. Attach red wire from harness to a constant +12V terminal on ignition switch or other +12V constant power source. Use an un-switched power source.

+12v DASH


For internal

LED models

- 6. Attach white wire to dash lighting or switchable +12V light source.
- 7. Reconnect negative (-) battery cable.

#### **CAUTION!**

As a safety precaution, the red wire of this product should be fused before connecting to the 12V ignition switch. We recommend using a 3 AMP automotive type fuse.

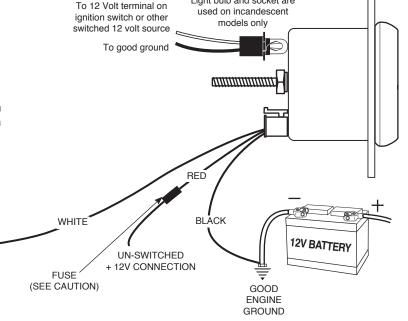


Light bulb and socket are

#### DO NOT HOOK TO ALTERNATOR

# **Setting the Time**

Use the two buttons on the face of the gauge to set the time. The left button moves the hands counter clockwise. The right button moves the hands clockwise.

A momentary press on either button moves the hands one minute. After pressing and holding either button for a couple seconds, the hands will begin moving at a much faster speed, moving the minute hand one hour in three seconds.



### **SERVICE**

For service send your product to Auto Meter in a well packed shipping carton. Please include a note explaining what the problem is along with your phone number. If you are sending product back for Warranty adjustment, you must include a copy (or original) of your sales receipt from the place of purchase

#### 12 MONTH LIMITED WARRANTY

AutoMeter Products, Inc. warrants to the consumer that all AutoMeter High Performance products purchased from an Authorized AutoMeter Reseller will be free from defects in material and workmanship for a period of twelve (12) months from date of the original purchase. Products that fail within this 12 month warranty period will be repaired or replaced at AutoMeter's option, when determined by AutoMeter that the product failed due to defects in material or workmanship. This warranty is limited to the repair or replacement of parts in the AutoMeter High Performance product and the necessary labor done by AutoMeter to effect the repair or replacement of the AutoMeter High Performance product. In no event shall AutoMeter's cost to repair or replace an AutoMeter High Performance Product under this warranty exceed the original purchase price of the AutoMeter High Performance Product. Nor shall AutoMeter Products, Inc. be responsible for special, incidental or consequential damages or costs incurred due to the failure of an AutoMeter High Performance Product. This warranty applies only to the original purchaser of the AutoMeter High Performance Product and is non-transferable. This warranty also applies only to AutoMeter High Performance Products purchased from an Authorized AutoMeter Reseller. All implied warranties shall be limited in duration to the said 12 month warranty period. Breaking the instrument seal, improper use or installation, accident, water damage, abuse, unauthorized repairs or alterations voids this warranty. AutoMeter disclaims any liability for consequential damages due to the breach of any written or implied warranty on all products manufactured by AutoMeter Products, Inc. For a comprehensive listing of Un-Authorized Auto Meter Resellers please visit www.autometer.com/autometerlocator/index/unauthorized.

FOR SERVICE SEND TO: AUTO METER PRODUCTS, INC. 413 W. Elm St., Sycamore, IL 60178 USA (866) 248-6357

Email us at service@autometer.com

http://www.autometer.com



4/3/17